



INDUSTRIAL-GRADE  
DIGI XBEE® TO IP  
GATEWAYS



# CONNECTPORT® X2

Customizable, low-cost Digi XBee® to Ethernet gateways offer easy IP networking of RF devices and sensor networks

ConnectPort X2 is a small Digi XBee to Ethernet gateway that provides low-cost IP networking of RF devices and sensor networks. Featuring an easy development environment, ConnectPort X2 enables custom applications to run locally while interfacing across existing Ethernet networks for WAN connectivity to the internet.

ConnectPort X2 products feature an end-to-end development environment based on local customization via Python, allowing for rapid M2M-specific application development on the industry standard Python scripting engine. Digi ESP™


provides an IDE featuring device detection, debugging, compiling and downloading of Python code to Digi gateways.

Digi Remote Manager® provides a platform for the design, testing and deployment of M2M solutions. Using Digi Remote Manager, developers are able to seamlessly integrate remote devices and device data into business applications and processes.


## BENEFITS

- Digi XBee to Ethernet IP gateways support numerous Digi XBee protocols
- Industrial grade enclosures for rugged environments
- Digi Remote Manager for secure, scalable access to an unlimited number of remote assets and seamless web services integration from Digi gateways into customer back office applications

## RELATED PRODUCTS

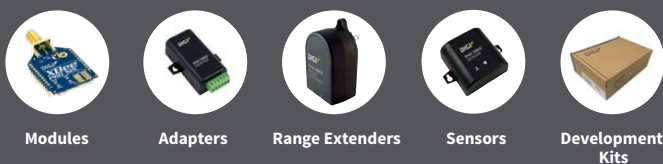

## APPLICATION EXAMPLE

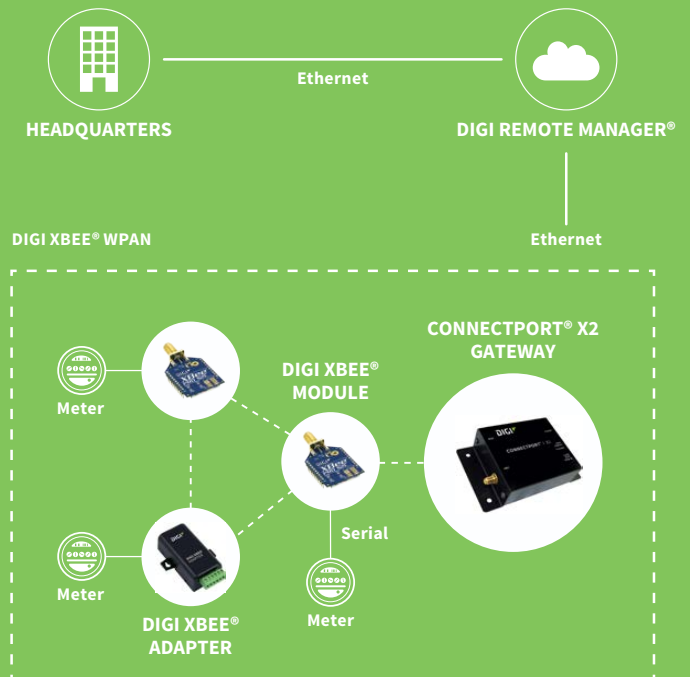

## SPECIFICATIONS

## ConnectPort® X2

## GENERAL

MANAGEMENT	HTTP/HTTPS web interface, Password access control, IP service port control, Optional secure enterprise management via Digi Remote Manager
PROTOCOLS	UDP/TCP, DHCP, SNMPv1
TOTAL MEMORY	8 MB Flash, 16 MB RAM
LEDS	Ethernet status, Power, ZigBee link/activity
SECURITY	SSL tunnels
DIMENSIONS (L X W X H) AND WEIGHT	5.50 in x 2.75 in x 1.13 in (13.9 cm x 7.0 cm x 2.9 cm); 0.44 lb (0.20 kg)

## WIRELESS INTERFACES

DIGI XBEE MODULE OPTIONS	802.15.4, ZigBee, DigiMesh 2.4, 900HP, XSC, 868
ANTENNA PORT	RPSMA female

## ETHERNET

PORTS	1 RJ-45 port
PHYSICAL LAYER	10/100Base-T
DATA RATE AND MODE	10/100 Mbps (auto-sensing); Full or half duplex (auto-sensing)

## POWER REQUIREMENTS

POWER INPUT	9-30 VDC
POWER SUPPLY	12 VDC power supply for 0° C to 60° C (32° F to 140° F) with locking barrel connector included; Extended temperature power supply available separately
POWER CONSUMPTION	Idle: 1.2 W, Max: 3.4 W
SURGE PROTECTION (W/INCLUDED POWER SUPPLY)	4 kV burst (EFT) per-4-4, 2 kV surge per EN61000-4

## ENVIRONMENTAL

OPERATING TEMPERATURE	-30° C to +70° C (-22° F to +158° F)
RELATIVE HUMIDITY	5% to 95% (non-condensing)
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263

## REGULATORY APPROVALS

SAFETY	EN60950
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A)

## PART NUMBERS

## DESCRIPTION

X2-Z11-EM-A	ConnectPort X2 - Digi XBee (ZigBee) to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-Z11-EM-W	ConnectPort X2 - Digi XBee (ZigBee) to Ethernet. Industrial enclosure. Antennas and power supply included. (International)
X2-A11-EM-A	ConnectPort X2 - Digi XBee (802.15.4) to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-A11-EM-W	ConnectPort X2 - Digi XBee (802.15.4) to Ethernet. Industrial enclosure. Antennas and power supply included. (International)
X2-HMA-EM-W	ConnectPort X2 - Digi XBee-PRO 900HP to Ethernet. Industrial enclosure. Antennas and power supply included, for Australia. (International)
X2-HMU-EM-A	ConnectPort X2 - Digi XBee-PRO 900HP to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-M11-EM-A	ConnectPort X2 - Digi XBee (DigiMesh 2.4 GHz) to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-M11-EM-W	ConnectPort X2 - Digi XBee (DigiMesh 2.4 GHz) to Ethernet. Industrial enclosure. Antennas and power supply included. (International)