# TRGPS-9084GT-M12X-BP2-MV

EN50155 Industrial 12-port rack mount managed Gigabit Ethernet switch with 8x10/100/1000Base-T(X) P.S.E. and 4x10/100/1000Base-T(X), M12 Connector and 2xbypass included

#### **Features**

- Supports O-Ring (recovery time < 30ms over 250 units of connection) and MSTP (RSTP/STP compatible) for Ethernet O-Chain allow multiple redundant network rings
- VLAN unaware: Supports priority-tagged frames to be received by specific IEDs
- Provided HTTPS/SSH protocol to enhance network security
- Supports IEEE 802.3az Energy-Efficient Ethernet technology
- Supports SMTP client and NTP server protocol
- Supports application-based QoS management
- Supports Device Binding security function
- Supports DOS/DDOS auto prevention
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Supports SNMP v1/v2c/v3 & RMON & 802.10 VLAN Network Management
- Supports port mirror function to monitor port data
- Support ACL and 802.1x User Authentication for security
- Supports 9.6K Bytes Jumbo Frame
- Multiple notification for warning of unexpected event
- Web-based ,Telnet, Console (CLI), and Windows utility (**Open-Vision**) configuration
- Support LLDP Protocol
- Support DBU-01 backup unit device to quickly backup/restore configuration
- 19 inches rack mountable design





















### Introduction


TRGPS-9084GT-M12X-BP2-MV is a Gigabit managed redundant ring Ethernet switch with 8x10/100/1000Base-T(X) P.S.E. and 4x10/100/1000Base-T(X), M12 connector and 2xbypass included. These switches support Ethernet Redundancy protocol, O-Ring (recovery time < 30ms) and MSTP (RSTP/STP compatible) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. And TRGPS-9084GT-M12X-BP2-MV supports wide operating temperature from -40°Cto 75°C. TRGPS-9084GT-M12X-BP2-MV can also be managed centralized and convenient by Open-Vision, as well as the Web-based interface, Telnet and console (CLI) configuration. Therefore, the switch is one of the most reliable choice for highly-managed and Fiber Ethernet application.


- **0-Ring**: 0-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The 0-Ring redundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.
- **0-Chain :** 0-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.

- Application-Based QoS: The switch also support application-based QoS. Application-based QoS can set highest priority for data stream according to TCP/UDP port number.
- **Device Binding Function :** ORing special Device Binding function can only permit allowed IP address with MAC address to access the network. Hacker cannot access the IP surveillance network without permission. It can avoid hacker from stealing video privacy data and attacking IP camera, NVR and controllers.
- Advanced DOS/DDOS Auto Prevention: The switch also provided advanced DOS/DDOS auto prevention. If there is any IP flow become big in short
  time, the switch will lock the source IP address for certain time to prevent the attack. It's hardware based prevention so it can prevent DOS/DDOS attack
  immediately and completely.
- **IEEE 802.3az Energy-Efficient Ethernet :** This is a set of enhancements to the twisted-pair and backplane Ethernet family of networking standards that will allow for less power consumption during periods of low data activity. The intention was to reduce power consumption by 50% or more.

### **Open-Vision**


ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

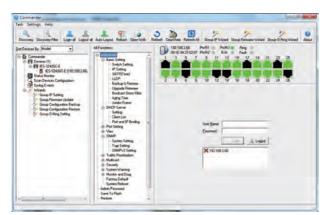

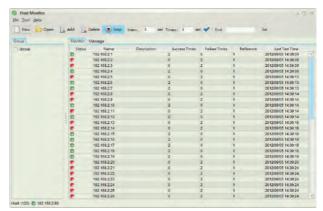


Commander

Host Monitor

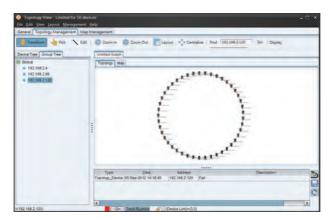

Topology View

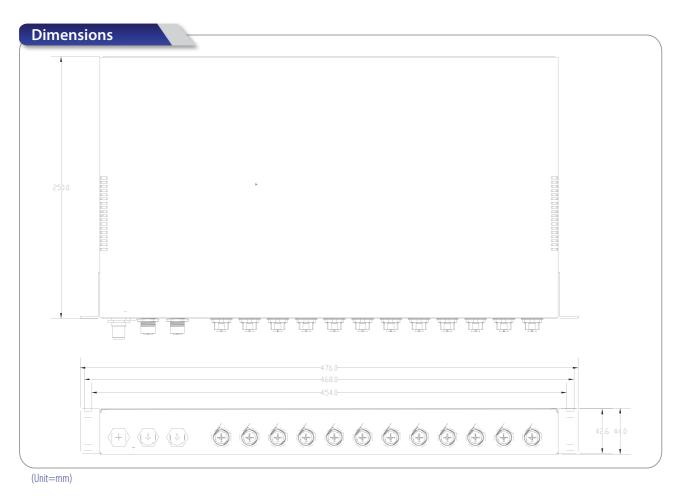

## **Specifications**

ORing Switch Model	TRGPS-9084GT-M12X-BP2-MV			
Physical Ports				
10/100/1000Base-T(X) P.S.E. in M12	8 (8-pin X-coding)			
10/100/1000Base-T(X) in M12	4 (8-pin X-coding)			
Technology				
Ethernet Standards	IEEE 802.3i for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol ) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)			
MAC Table	8k			
Flash Memory	128Mbits			
DRAM Size	1Gbits			
Jumbo frame	Up to 9.6K Bytes			
Priority Queues	8			
Processing	Store-and-Forward			

Switch Properties	Switching latency: 7 us Switching bandwidth: 24 Gbps Max. Number of Available VLANs: 4094 VLAN ID range: VID 1 to 4094 IGMP multicast groups: 128 for each VLAN Port rate limiting: User Define
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) MAC-based authentication (802.1x) VLAN (802.1Q) to segregate and secure network traffic Radius centralized password management SNMPv3 encrypted authentication and access security Https / SSH enhance network security Web and CLI authentication and authorization IP source guard
Software Features	IEEE 802.1D Bridge, auto MAC address learning/aging and MAC address (static) MSTP (RSTP/STP compatible) Redundant Ring (O-Ring) with recovery time less than 30ms TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging Guest VLAN IGMP v2/v3 Snooping Application-based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security DHCP Server/Client/Relay SMTP Client NTP server
	0-Ring
Network Redundancy	O-Chain MSTP (RSTP/STP compatible)
RS-232 Serial Console Port	RS-232 in 5-pin M12 connector with console cable. 115200bps, 8, N, 1
LED Indicators	
Power Indicator (PWR)	Green: Power LED x 1
Ring Master Indicator (R.M.)	Green: Indicates that the system is operating in O-Ring Master mode
O-Ring Indicator (Ring)	Green : Indicates that the system operating in O-Ring mode Green Blinking : Indicates that the Ring is broken.
Fault Indicator (Fault)	Amber : Indicate unexpected event occurred
Fault Indicator (Fault)  10/100/1000Base-T(X) M12 P.S.E. Port Indicator	Amber : Indicate unexpected event occurred  Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator  Bottom dual color LED for port Link/Act indicator
	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps. Middle Green LED for PoE enable indicator
10/100/1000Base-T(X) M12 P.S.E. Port Indicator	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps. Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps
10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps. Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps
10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator Fault Contact	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps. Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator
10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator Fault Contact Relay	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps. Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator
10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator Fault Contact Relay Power	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator  Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps  Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact  Relay  Power  power input	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator  Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps  Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact Relay Power power input PoE Output Power	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact  Relay  Power  power input  PoE Output Power  Power consumption (Typ.)	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact Relay  Power  power input  PoE Output Power  Power consumption (Typ.)  Overload current protection	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)  Present
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact  Relay  Power  power input  PoE Output Power  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)  Present
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact Relay  Power  power input  PoE Output Power  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristic	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)  Present  Present
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact Relay  Power  power input  PoE Output Power  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristic  Enclosure	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)  Present  Present
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact Relay  Power  power input  PoE Output Power  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristic  Enclosure  Weight (g)	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)  Present  Present  IP-30  4,550g
10/100/1000Base-T(X) M12 P.S.E. Port Indicator  10/100/1000Base-T(X) M12 Port Indicator  Fault Contact Relay  Power  power input  PoE Output Power  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristic  Enclosure  Weight (g)  Dimension (W x D x H)	Top Green LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps.  Middle Green LED for PoE enable indicator Bottom dual color LED for port Link/Act indicator  Top dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps Bottom Green LED for Link/Act indicator  Relay output to carry capacity of 3A at 30VDC on M12 connector (A-coding)  72~110VDC on 4-pin S-coded M12 connector 61.6W  20W (not include PoE output)  Present  Present  IP-30  4,550g

Operating Humidity	5% to 95% Non-condensing	
Regulatory Approvals		
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B, EN50155 (EN50121-3-2, EN55011)	
EMI	EN 55032, CISPR32, EN 6100-3-2, EN 6100-3-3,FCC Part 15B class A	
EMS	EN 55024 (IEC 61000-4-2 (ESD), IEC 61000-4-3 (RS), IEC 61000-4-4 (EFT), IEC 61000-4-5 (Surge), IEC 61000-4-6 (CS), IEC 61000-4-8 (PFMF), IEC 61000-4-11 (DIP))	
Shock	IEC60068-2-27	
Free Fall	IEC60068-2-31	
Vibration	IEC60068-2-6	
Safety	EN 60950-1	
Other	EN50155	
MTBF	298,128 hours	
Warranty	5 years	

## Ordering Information

Available Model	Model Name	Description
	TES-3080-M12	EN50155 8-port managed Ethernet switch with 8x10/100Base-T(X), M12 connector
Packing List  • TRGPS-9084G  • Rack-mount K  • ORing Tool CD  • Console Cable	x 1 x 1	Optional Accessories (Can be purchased separately)  Open-Vision M500: Powerful Network Management Windows Utility Suit, 500 IP devices  DBU-01: backup unit device