


Dimension Drawing

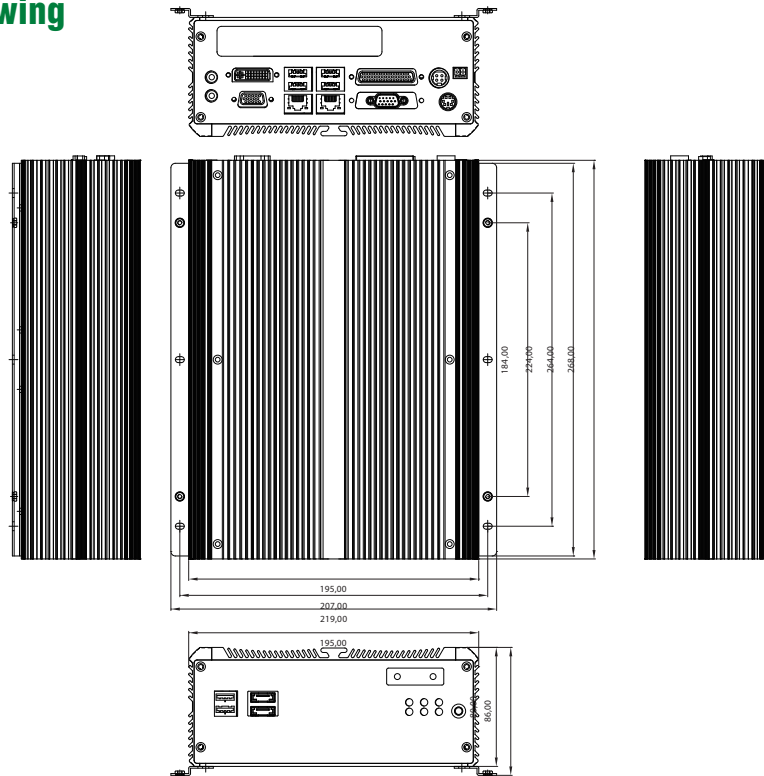

Power Requirements

- ATX power mode
- On-board DC to DC power support from 9V to 30V DC
- Optional power adapter

Dimensions

- 195mm (W) x 268 mm (D) x 80mm (H) (7.7" x 10.5" x 3.1")

Construction

- Aluminum Chassis with fanless design

Environment

- Operating temperature:
Ambient with air flow: -5°C ~ 55°C
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (Non-Condensing)

Certifications

- CE approval
- FCC Class A

Ordering Information

- **Barebone**
NISE 3500 (P/N: 10J00350000X0) RoHS Compliant
Intel® Core™ i7/i5 Fanless System with one PCI Expansion Slot
- **19V, 120W AC/DC Power Adapter w/o power core**
(P/N: 7410120002X00)