


Digi One™ IAP

Device Server

Digi One IAP is designed for industrial serial-to-Ethernet connectivity, protocol conversion and protocol interoperability. It is ideal for industrial applications requiring specific industry protocol support and where device management and monitoring is critical.

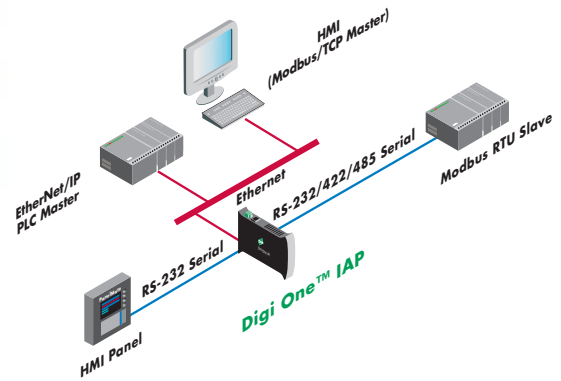

Features/Benefits

- > Industrial serial-to-Ethernet converter and protocol bridge
- > TCP/UDP and RealPort COM/TTY remote COM port access
- > Multi-master/multi-protocol concurrent support for Allen-Bradley and Modbus protocols
- > Serial and Ethernet protocol bridging support for Allen-Bradley and Modbus protocols promotes interoperability
- > ASCII to protocol translation for Allen-Bradley and Modbus
- > Industrial DIN rail mounting
- > DB-9M and screw terminals serial ports
- > Second serial port can be used as a pass-through port
- > RS-232/422/485 switch selectable in field
- > Class 1, Div 2 rated
- > Industry leading low latency

Overview

Digi One IAP provides a means of connectivity and interoperability of serial and Industrial Ethernet devices such as Programmable Logic Controllers (PLCs), process and quality equipment, motors, drives, bar-code readers, operator displays and other types of manufacturing equipment.

Digi One IAP is a device server and a protocol bridge rolled into one. The device server functionality allows virtually any device with a serial port to be connected to a TCP/IP network. Applications may communicate with the serial device using TCP/UDP or Digi's patented RealPort® COM port redirection for remote native COM port access.

The protocol conversion portion enables Digi One IAP to actually bridge together two industrial devices, provided that they speak any of the supported serial (DF1, Modbus, ASCII) or Ethernet (Modbus/TCP, AB/Ethernet, EtherNet/IP) protocols. It also allows for multi-master access, which means that many masters can simultaneously communicate with a single slave, even if they are using different protocols. In addition, Digi One IAP is able to convert ASCII data from scales, bar-code readers, RFID devices, cameras and other devices to Industrial Ethernet protocols.

Digi One IAP provides another unique feature – a second serial port which can act as a pass-through port. This means that a local serial device like an HMI panel can communicate through Digi One IAP to a PLC slave, without disrupting the serial-to-Ethernet connection to its master application across the network.

Digi International, the leader in Connectware, makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



Connectware™

Features/Specifications

FEATURES

- 10/100Base-T Ethernet support
- TCP/UDP Socket Services
- Support for 64 concurrent socket connections
- Web-based browser configuration
- Patented RealPort technology for COM and TTY ports
- SNMP (read/write)
- PPP
- DHCP/RARP, ARP-Ping, Static IP for IP address assignment
- Digi Port Authority – Remote management diagnostics and auto-discovery tool
- Flash upgradeable firmware
- DB-9M and screw terminal block serial port
- DB-9M can be enabled as second direct RS-232 port connection to device on screw terminal
- Baud rates up to 230 Kbps
- Protocol bridge support
 - Ethernet protocols: Modbus/TCP, EtherNet/IP, Allen-Bradley Ethernet
 - Serial protocols: ASCII, DF1, Modbus RTU/ASCII
- Multi-master support for above plus Omron serial protocols and user-defined
- 35mm DIN rail mounting
- Removable screw terminal for power
- 9-30VDC input
- Powered Ethernet 802.3af (midspan) support and fail-over capability when used with 9-30VDC input
- LED status for serial signals, power, Ethernet and diagnostics
- Full modem and hardware flow control
- <6 ms serial over Ethernet latency

ENVIRONMENTAL

- Operating temperature: 0° C to 60° C (32° F to 140° F)
- Relative humidity: 5% to 90% (non-condensing)
- Ethernet isolation: 1500VAC min per IEEE 802.3/ANSI X3.263
- Serial port protection (ESD): +15KV air GAP and +8Kv contact discharge per IEC 1000-4-2

POWER REQUIREMENTS

- 9-30VDC @ .5 Amps max
- IEEE 802.3af compliant
- 2KV isolation between power supply and serial ground

No power supply ships with this product.

REGULATORY APPROVALS

- FCC Part 15, Class A
- CE
- Class 1, Div 2 – UL 1604
- ICES-003, A
- EN55022, A
- EN 6100-6-2 + EN55024
- UL 1950
- CSA 22.2 No. 950
- EN 60950
- AS3548

OPERATING SYSTEMS

RealPort drivers for COM/TTY support

- AIX
- Compaq Tru64
- HP-UX
- Linux
- Windows® XP
- Windows 2000
- Windows NT®
- Windows 98/ME
- Windows Server™ 2003
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)




DIMENSIONS

- Length: 4.7 in. (12.0 cm)
- Depth: 4.0 in. (10.1 cm)
- Width: 0.9 in. (2.3 cm)
- Weight: 2.5 oz (64.0 g)



Screw terminal block for serial port connection DB-9M serial connector

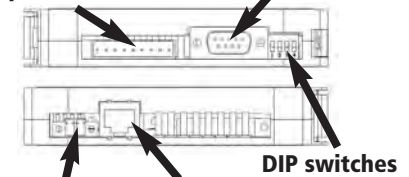

Power input screw terminals Ethernet

Slave	MB RTU	MB Serial	MB/TCP	DF1	A-B Eth	ENet/IP *	ASCII
Master							
MB Serial	-	Yes	Yes	Yes	Yes	Yes	Yes
MB/TCP	Yes	Yes	-	Yes	Yes	Yes	Yes
DF1	Yes	Yes	Yes	-	Yes	Yes	Yes
A-B Eth	Yes	Yes	Yes	Yes	-	Yes	Yes
ENet/IP	Yes	Yes	Yes	Yes	Yes	-	Yes
ASCII	No	No	No	No	No	No	-

* PCCC encapsulated under CIP only for EtherNet/IP

MODEL.....PART NUMBERS

Model
Digi One IAP

North America
70001777

International
70001777