

AX60552



8-Slot ShoeBox Chassis



Features



- ▶ Two 5.25" and two 3.5" HDD drive bays
- ▶ Desktop or wallmount industrial computer chassis
- ▶ Equipped with PS/2 type power supply

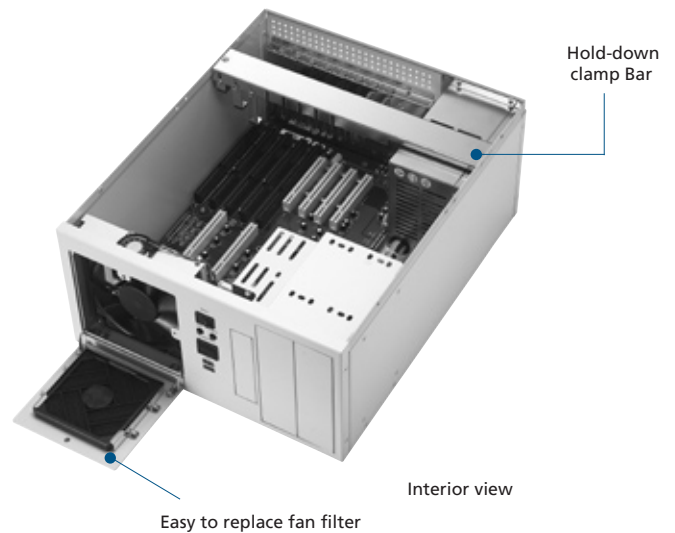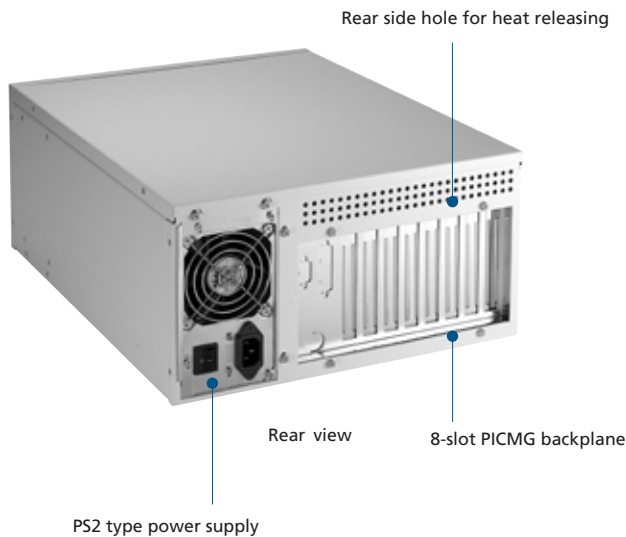

Specifications

Standard Color	Beige color
Construction	Heavy-duty cold-rolled steel
Drive Capacity	Exposed 2 x 5.25" HDD drive bay and 1 x 3.5" HDD drive bay; internal 1 x 3.5" HDD drive bay
Cooling	One 12cm ball-bearing fan (88CFM) with a removable filter
Front Panel Indicators	1 x power on/off; 1 x HDD LED
Front Panel Controls	1 x power on/off, 1 x system reset
Front Panel Connectors	2 x USB, ports
Pre-punched Panel rear	1 x 9-pin ; 1 x 25pin
System Board	Full-Size SBCs
Expansions	8-slot backplane
Power Supply	PS2 power supply

Speaker	One 0.4W speaker
Hold-down clamp	Multi-height adjustable card retainer protecting plug-in add-on card against vibration
Operation Temperature Range	0°C (32°F) to 40°C (104°F)
Dimensions (W x D x H)	14.52" (368.8mm) x 16.04" (407.5mm) x 6.98" (177.3mm)

Power Supply Options

Items	Watt	Specifications		
		Input	Output	MTBF
PS300-XP2	ATX 300W (PFC)	Slide Switch (115V _{AC} /230V _{AC})	+5V @ 30/21.5A +12V @ 15A -12V @ 0.8A +33V @ 15/28A +5VSB @ 2A -5V @ 0.3A	100,000 hours
PS400-XP2	ATX 400W (PFC)	AC 90~264V Auto	+5V @ 20A +3.3V @ 20A +12V @ 16A -12V @ 0.5A +5VSB @ 2.5A	100,000 hours
PS500-XP2	ATX 500W (PFC)	AC 90~265V Auto	+5V @ 30A +3.3V @ 15A +12V @ 17A -12V @ 30A +5VSB @ 2A	100,000 hours

Backplane Options

PICMG 1.0

Models	Slots per Segment (ISA/PCI/CPU)	Segment
ATX6022/8GP7	0/7/1	Single
ATX6022/8	3/4/1	Single

PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
FAB208	0/6/1/1	Single
HAB208	0/6/1/1	Single

Ordering Information

AX60552WB/X300P With ATX 300W power supply

AX60552WB/X400P With ATX 400W power supply

AX60552WB/X500P With ATX 500W power supply

* Specifications and certifications are limited to optional.

Dimensions

