



Features

- 11th Gen Intel® Core™ i7/i5/i3 BGA Processor
- 2 x 260-pin SODIMM socket Max. up to 64GB DDR4 3200MT/s
- Rich I/O, 4-USB3.1, 2-USB2.0, 1-DP, 2-HDMI, 4-COM, 4-LAN, 1-8bit GPIO
- Support 5G (Sub-6G) module, M.2 NVMe SSD Gen. III x 4, HDMI 2.0b (4K @ 60Hz), LAN 2.5G Base-Tx GbE
- Fanless operation temperature from -40°C ~ 70°C (WT) / 0°C ~ 70°C (ST)
- CE, FCC Class B, IP50
- Wide range DC power input from +9~36V
- Support HW TPM 2.0



Modular Design



5G/ Wi-Fi 6E Available



Vibration/
Shock
5G/55G



ST 0~70°C
WT -40~70°C



Wide-DC Input
9~36Vdc

Specifications

System Information

Processor	Intel® Core™ i7-1185GRE Processor (15W, 12M Cache, up to 2.80 GHz), WT Intel® Core™ i5-1145GRE Processor (15W, 8M Cache, up to 2.60 GHz), WT Intel® Core™ i3-1115GRE Processor (15W, 6M Cache, up to 3.00 GHz), WT Intel® Core™ i7-1185G7E Processor (15W, 12M Cache, up to 2.80 GHz), ST Intel® Core™ i5-1145G7E Processor (15W, 8M Cache, up to 2.60 GHz), ST Intel® Core™ i3-1115G4E Processor (15W, 6M Cache, up to 3.00 GHz), ST
System Memory	2 x 260-pin SODIMM socket Max. up to 64GB DDR4 3200 MT/s
I/O Chipset	EC ITE IT8528E
BIOS Information	AMI uEFI BIOS 256 Mbit SPI Flash ROM
Watchdog Timer	H/W Reset, 1sec. ~ 65535sec.
H/W Status Monitor	CPU & system temperature monitoring and Voltages monitoring
TPM	TPM 2.0
SBC	EBM-TGLS + EBM-BYTS DB-A

Expansion

M.2	1 x M.2 Key-B 2242/3042/3052 support SATA3/ PCIeIII x1/ USB3.1 and SIM slot1 1 x M.2 Key-E 2230 for Wi-Fi & BT Module (CNVi)
-----	---

Storage

M.2	1 x M.2 Key-M 2242/2280, support PCIe Gen. III x 4 (NVMe SSD) 1 x M.2 Key-B 2242, support SATA (share with expansion slot)
-----	---

Front I/O

Power Button	1 x Push Button for Power on/off
Reset Button	1 x Push Button for Reset
LED Indicator	1 x Power LED (Blue) 1 x Storage LED (Yellow) - M.2 B-key SATA 1 x LTE LED (Green) - M.2 B-key PCIe 1 x Wifi LED (Green) - M.2 E key
COM Port	2 x COM RS232/422/485 (select via BIOS, auto flow control via HW)
Digital I/O	1 x 8-bit GPIO (DB9)
Wire-Control Power On/Off	1 x 2-Pin Terminal Block for wire-control power on/off
Antenna	2 x Antenna with dust cover

Rear I/O

USB	2 x USB 3.1 Gen.2 (10Gbp/s), 2 x USB 3.1 Gen.1 (5Gbp/s) 2 x USB 2.0
COM Port	2 x COM RS232/422/485 (select via BIOS, auto flow control via HW)
LAN Port	4 x RJ-45
Audio	1 x Mic-In, 1 x Line-Out

DP	1 x DP++
HDMI	2 x HDMI
Antenna	2 x Antenna with dust cover
AC/DC Input	1 x 3-Pin Terminal Block (V+, V-, GND)

Right I/O & Left I/O

Antenna	2 x Antenna with dust cover
---------	-----------------------------

Display

Graphic Chipset	Intel® Iris® Xe Graphics (i7-1185GRE/i5-1145GRE/i7-1185G7E/i5-1145G7E) Intel® UHD Graphics for 11th Gen Intel® Processors (i3-1115GRE/i3-1115G4E)
Resolution	DP++ : Max. resolution 4096x2304 @ 60Hz HDMI : Max. resolution 4096x2304 @ 60Hz

Audio

Audio Codec	Realtek ALC888S HD codec
-------------	--------------------------

Ethernet

LAN Chipset	1 x Intel® I225-LM, 1 x Intel® I219-LM, 2 x Intel® I211-AT
Specification	1 x 10/100/1000/2.5G Base-Tx GbE compatible 3 x 10/100/1000Base-Tx GbE compatible

Power Requirement

Voltage Input Spec.	DC in 12/24V (+9V ~ +36V), wide voltage single power input TVS component for surge protection Reverse current/voltage protection (Max. Currency: 13A)
---------------------	---

Voltage Input Connector	3-Pin Terminal Block (V+, V-, GND)
-------------------------	------------------------------------

ACPI	Single power ATX Support S0, S3, S4, S5; ACPI 5.0 Compliant
------	---

Power Mode	AT/ ATX (ATX is default setting)
------------	----------------------------------

Software Support

OS	Win 10 64bit, Linux
----	---------------------


Certification

Certification Information	CE, FCC Class B
---------------------------	-----------------

Mechanical & Environmental

Operating Temp.	-40°C ~ 70°C (w/SSD) ambient w/ air flow, WT sku 0°C ~ 70°C (w/SSD) ambient w/ air flow, ST sku
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Dimension (W x L x H)	240mm x 150mm x 69 mm (w/ IET module)
Weight	2.3 kg (System)
Vibration Test	With SSD : 5Grms, IEC 60068-2-64, Random, 5 ~ 500Hz, 1hr/axis
Shock Test	With SSD : 55Grms, IEC 60068-2-27, Half Sine, 11ms
IP Rating	IP 50
Mounting Kit	Wall mount kit (standard), DIN RAIL (optional)

Mechanical Drawing

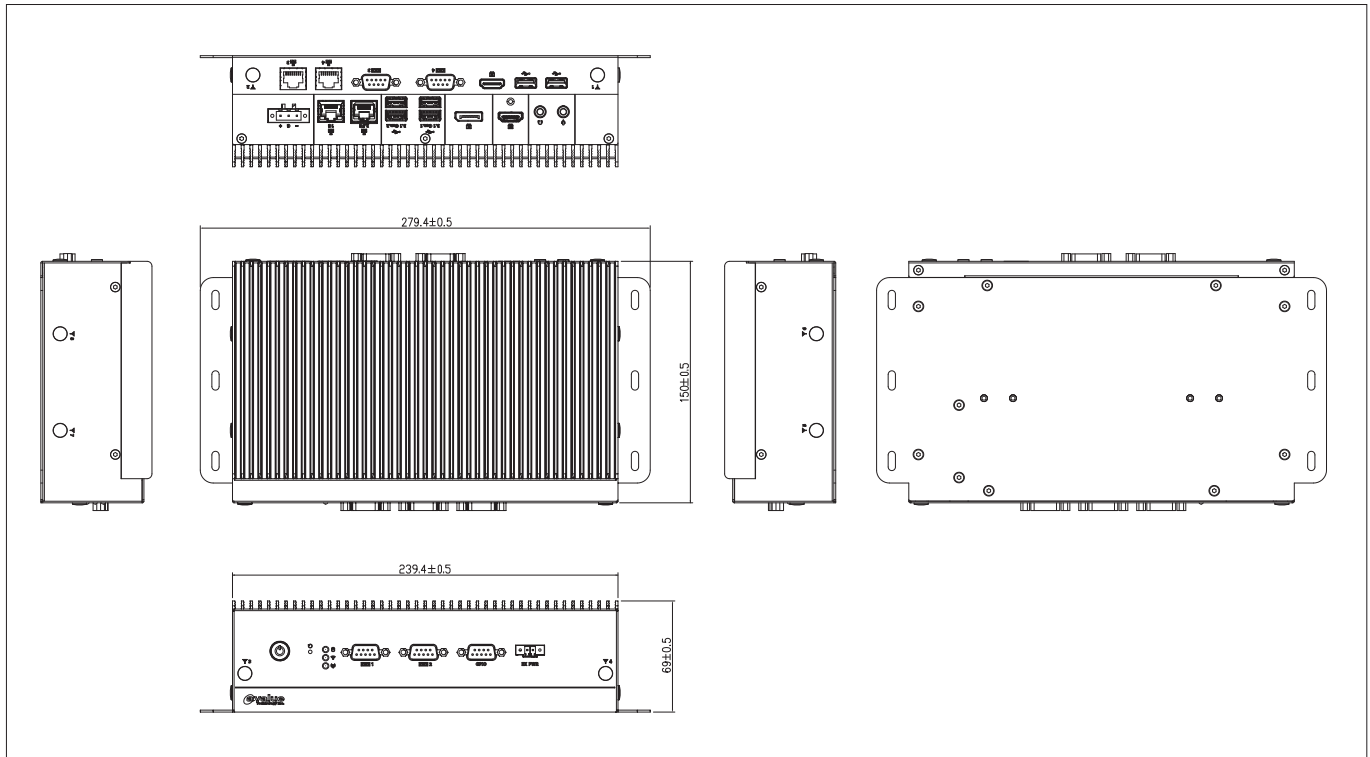

Ordering Information

P/N	Processor	Chipset	Memory	Storage	Adapter/ PSU	Mounting Kit	Temp.
EMS-TGL-W85-A1-6R	Intel® Core™ i7-1185GRE Processor	N/A	8GB DDR4 (Up to 64G Optional)	(Optional)	60W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 70°C
EMS-TGL-W45-A1-6R	Intel® Core™ i5-1145GRE Processor	N/A	8GB DDR4 (Up to 64G Optional)	(Optional)	60W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 70°C
EMS-TGL-W15-A1-6R	Intel® Core™ i3-1115GRE Processor	N/A	8GB DDR4 (Up to 64G Optional)	(Optional)	60W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 70°C
EMS-TGL-S85-A1-6R	Intel® Core™ i7-1185G7E Processor	N/A	8GB DDR4 (Up to 64G Optional)	(Optional)	60W Adapter (Optional)	Wall Mount (Din Rail Optional)	0°C ~ 70°C
EMS-TGL-S45-A1-6R	Intel® Core™ i5-1145G7E Processor	N/A	8GB DDR4 (Up to 64G Optional)	(Optional)	60W Adapter (Optional)	Wall Mount (Din Rail Optional)	0°C ~ 70°C
EMS-TGL-S15-A1-6R	Intel® Core™ i3-1115G4E Processor	N/A	8GB DDR4 (Up to 64G Optional)	(Optional)	60W Adapter (Optional)	Wall Mount (Din Rail Optional)	0°C ~ 70°C

Packing List

Item	Quantity
EMS-TGL 11th Gen Intel® Core™ Processor i7/i5/i3 Fanless Rugged Embedded System w_HDMI IET Module	1
Terminal block to lockable DC Jack cable	1
DP to VGA converter	1
Wire tie for HDMI	1
Screw driver for chassis	1
Screw kits for peripheral	1

Optional Items

Item	P/N
AC/DC adapter 12V/5A 90 Screw Type	ACC-ADP-060N-14R ACC-ADP-060N-08R
Power Cord 3P (F)-3P (M) 183cm, USA type	E1702031833R
Power Cord SL-6+SL-3 183cm, EU type	E1702031000R
Power Cord 3P (F)-3P (M) 183cm, Japan w/PSE type	E1702031834R
Power Cord 0P-026+SL-3 183cm, UK type	E170P060380R
Power Cord 3P (F)-3P (M) 183cm, Australia type	E1702031831R
Din Rail Kit	-

I/O Overview

