


GPU SuperServer AS -8126GS-NB3RT

DP AMD 8U GPU System with NVIDIA HGX B300 NVL8



Key Applications


Scientific Research, Conversational AI, Business Intelligence & Analytics, Drug Discovery, Finance Services and Fraud Detection, AI/Deep Learning Training and Inference, Large Language Model (LLM) and Generative AI, High Performance Computing (HPC), Autonomous Vehicle Technologies,

Key Features

- Dual AMD EPYC™ 9005/9004 Series Processors;
- 8x Blackwell 300 Ultra SXM GPUs;
- Supports up to 24 DIMM slots, 6400 MT/s 6TB DDR5 memory (1DPC only) (Please check System Memory Section for detail);
- 8x OSFP 800GbE;
- 2x PCIe 5.0 x16 FHHL slots;
- 8x front hot-swap E1.S NVMe drive bays;
- 6x 6600W Redundant (3 + 3) Titanium Level (96%) power supplies (Power supply full redundancy based on configuration and application load);



Form Factor	8U Rackmount Enclosure: 449 x 356 x 950mm (17.6" x 13.8" x 37.4") Package: 1255 x 700 x 750mm (51" x 27.6" x 29.5")
Processor	Dual processor(s) AMD EPYC™ 9005/9004 Series Processors Up to 384C/768T
GPU	Max GPU Count: 8 onboard GPUs Supported GPU: NVIDIA SXM: HGX B300 8-GPU (288GB) GPU-GPU Interconnect: NVIDIA® NVLink® with NVSwitch™
System Memory	Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 6TB 6400MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor) Max Memory (1DPC): Up to 6TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor)
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none"> • 8 front hot-swap E1.S NVMe drive bays M.2: 2 M.2 NVMe slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHHL slots
On-Board Devices	Chipset: System on Chip Network Connectivity: 8 OSFP 800GbE
Input / Output	USB: 1 USB 3.0 Type-A port(Front) 1 USB 2.0 Type-A port(Front) Video: 1 VGA port 1 mini-DP port

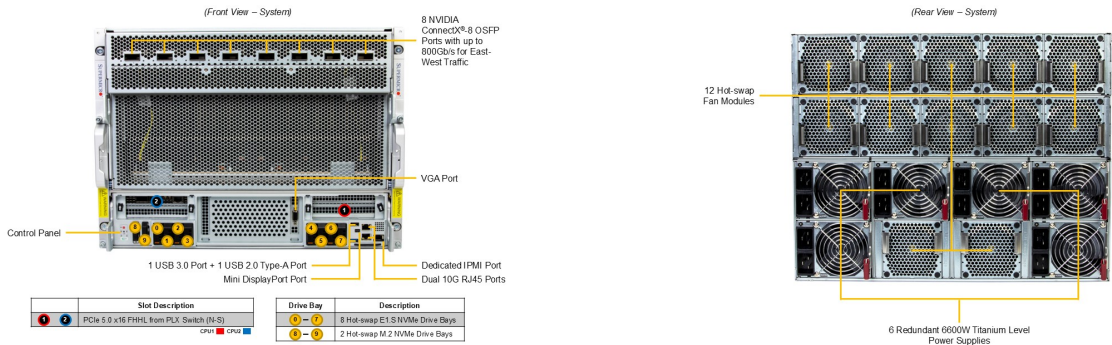

System Cooling	Fans: Up to 12 heavy duty fans with optimal fan speed control
Power Supply	6x 6600W Redundant (3 + 3) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB UEFI
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 8+4 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 266.76 lbs (121 kg) Net Weight: 108 lbs (49.4 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super H14DSG-OM
Chassis	CSE-GP807TS-R000NP