


# IMB-791

## ATX Motherboard

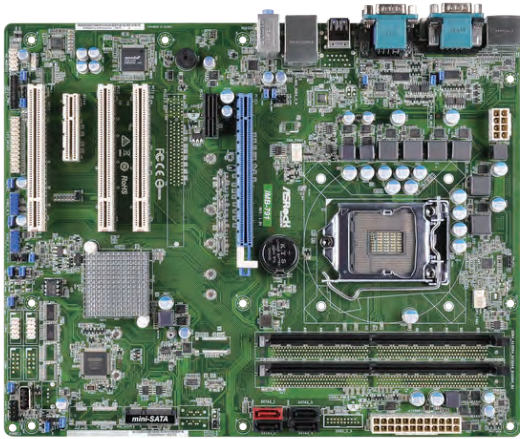

### Spotlight Features

- Supports Intel® 7<sup>th</sup>/ 6<sup>th</sup> Gen (Kabylake-S/Skylake-S) Core™ Processors (Socket 1151)
- Supports Dual Channel DDR4 2133, up to 32GB
- 1 x VGA, 2 x Displayport
- 4 x USB 3.0, 5 x USB 2.0, 4 x SATA3
- 1 x PCIe x16, 1 x PCIe x1, 3 x PCI, 1 x PCIe x4
- 1 x mSATA
- 1 x Intel LAN
- ATX PWR Con (24+8-pin)

### Specifications

#### Processor System

Dimensions	ATX (12-in x 9.6-in)
CPU	Supports Intel® 7 <sup>th</sup> / 6 <sup>th</sup> Gen (Kabylake-S/Skylake-S) Core™ Processors
Chipset	Intel® H110

#### Expansion Slot

PCIe	1 x PCIe x16, 1 x PCIe x1, 1 x PCIe x4
Mini-PCIe	N/A
M.2	N/A
PCI	3
mSATA	1 x Full size with shared SATA3 and USB 2.0

#### Memory

Technology	Dual Channel DDR4 2133MHz
Max.	32GB
Socket	2 x Long-DIMM

#### Graphics

Controller	Intel® Gen9 Graphics DX 11/12, OGL4.3/4.4
VGA	Supports max resolution up to 1920 x 1200
LVDS	N/A
eDP	N/A
HDMI	N/A
DVI	N/A
DisplayPort	Supports max resolution up to 4096 x 2160@60Hz
Multi Display	Dual Display

#### Ethernet

Interface	10/100/1000 Mbps
Controller	1 x Intel I219V

#### Environment

Operating Temperature	0°C – 60°C
Storage Temperature	-40°C – 85° C

#### Rear I/O

VGA	1
DVI	N/A
HDMI	N/A
DisplayPort	2
Ethernet	1
USB	4 x USB 3.0
Audio Jack	3 (Mic-in, Line-in, Line-out)
Serial	1 x COM (RS-232/422/485), 1 x COM (RS-232)
PS/2	1 x PS/2 combo

#### Internal Connector

USB	5 x USB 2.0 (2 x 2.54 pitch header, 1 x USB 2.0 vertical Type-A)
LVDS	N/A
eDP	N/A
VGA	N/A
Serial	2 x COM (RS-232)
SATA	4 (SATA1 shared with mSATA)
Parallel	1 (shared with GPIO)
GPIO	8 x GPI, 8 x GPO (shared with LPT header)
SATA PWR Output Con	N/A
Speaker Header	N/A
TPM	1 x Header

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min

#### Power Requirements

Input PWR	ATX PWR Con (24+8-pin)
Power On	AT/ATX Supported AT : Directly PWR on as power input ready ATX : Press button to PWR on after power input ready