
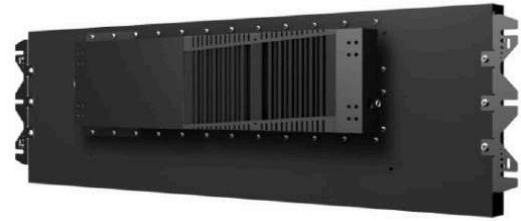


OFM-3700

37" High Brightness Stretched Display (CVD)

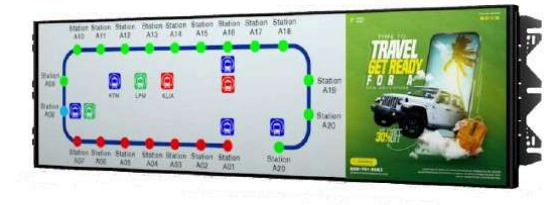

Product Features

- 37"1920x540 Resolution
- Hi Tni panel
- Sunlight readable
- IK10
- Application : Transportation
- High Brightness
- Optical Bonding with Low reflect cover glass
- IP65
- Wide Operating Temperature

Specification

Certification

Certification Information EN50155/EN45545

External I/O

HDMI 1x HDMI

Panel

LCD Size	37"
Resolution	1920 x 540
Luminance	1000 cd/m2
Contrast ratio	5000
Frame Rate (Hz)	60
Active Display Area (mm)	904.32 x 254.34
Response time	11 ms

Mechanical & Environmental	
Operating Temp.	-25°C ~ 55°C
Storage Temp.	-30°C ~ 85°C
Power Consumption (W/max.)	85
Power Requirement	+24~+110V DC In
Dimension (W x L x H)	961 x 290.9 x 86.76 mm
Ordering Information	

Ordering Information	OFM-3700-X000G-1R 37" Open frame transportation monitor/ 1920 x 540/ 1000nits/ HDMI/ DC-IN/ EN45545/EN50155 certify/+24 ~ 110V DC-in VMS-RPPS Intel® 13th Core 7/5/3/Celeron®Processor/4LAN/4COM/4USB/2DP/2HDMI VMS-CFS 8th/9th Gen Intel® Core™ i7/i5/i3/Pentium®/Celeron® Processors/2LAN/3COM/4USB/1DP/2HDMI AIB-Q6490 Qualcomm® Kryo™ 670, 8 cores, up to 2.7 GHz, 12 TOPS (INT8)/1LAN/1COM/6USB/1HDMI/DC IN AIB-3588 Rockchip RK3588/2LAN/4USB/1HDMI IN/2HDMI OUT/1Type C DP/DC IN AIB-3566 Rockchip RK3566/1LAN/2USB/1HDMI IN/1HDMI OUT/DC IN
----------------------	---