# W15L100-POB2

# 14.9" Multi-Touch Open Frame Display



#### **KEY FEATURES**

- 14.9" 1920 x 720 Resolution
- VGA input and HDMI input
- Open frame
- Projected Capacitive Multi-Touch



### **OVERVIEW**



#### 14.9" 1920 x 720 Resolution

Multi-touch open frame display 14.9" 1920 x 720 resolution is a compact and sleek display solution. With its 14.9-inch size and 1920 x 720 resolution, it offers clear and vibrant visuals. The open frame design without a bezel provides an immersive viewing experience. This versatile display is suitable for various applications such as interactive klosks and industrial equipment. Its high-definition clarity and compact size make it a reliable choice. Experience stunning visuals and seamless integration with the multi-touch open frame display 14.9" 1920 x 720 resolution.



### VGA Input and HDMI Input

The multi-touch open frame display 14.9" features both VGA and HDMI inputs, offering versatile connectivity options for various devices. With the VGA input, you can connect analog devices such as older computers or laptops. The HDMI input allows you to connect modern devices like gaming consoles, Blu-ray players, or multimedia devices that support digital signals. This multi-touch open frame display provides the flexibility to connect a wide range of devices, ensuring compatibility and ease of use in various applications. Experience seamless connectivity and enhanced display options with the multi-touch open frame display 14.9" featuring VGA and HDMI inputs.



#### Open Frame Display

The multi-touch open frame display with a 14.9" screen size offers a compact and versatile display solution. Its multi-touch open frame design allows for easy integration into various applications and installations. With its optimal size, it strikes a balance between portability and visibility. Whether used in kiosks, point-of-sale systems, or industrial equipment, this multi-touch open frame display delivers clear and vibrant visuals. Its compact form factor makes it suitable for space-constrained environments. Experience the convenience and versatility of the multi-touch open frame display with its 14.9" screen, perfect for a wide range of applications.

#### **SPECIFICATIONS**

Display


Mechanical

Туре	Projected Capacitive Multi Touch	Resolution	1920x720
Size	14.9 inches	Contrast Ratio	1000:1
Panel Brightness	950.0 nits	Display Color	16.7M Colors
View Angles	85,85,85,85	Active Area	355.68×133.38 mm
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen	Video	1xVGA 1x HDMI (Optional) 1x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)		

Dimension	407 x 178 x 59 mm	Mounting	Panel Mount
Enclosure	Metal	Cooling System	Fanless Design
Accessory			
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	Optional Accessory	Remote Controller (Optional, Varies by product)
Power			
Power Rating	12V DC in 24V DC in (optional)		
Control			

#### **DIMENSIONS** UNIT:MM

Button

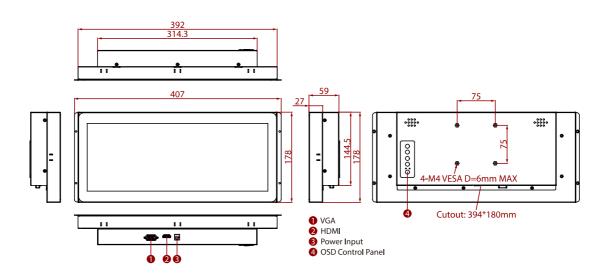

## NOTE

5 Keys: - , + , Power , Esc , Enter

- 1. This is a simplified drawing and some components are not marked in detail.
  2. Please contact our sales representative if you need further product information.
  3. All specifications are subject to change without prior notice.
  4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.