

R10IAD3S-OFT2

10.4" Intel® Core™ i5-1235U Open Frame Panel PC



KEY FEATURES

- 10.4" 1024 x 768 Resolution Open Frame PC
- 12th Gen Intel® Core™ i5-1235U processor
- 1 x SODIMM, DDR5 4800MHz, support up to 32GB
- Integrated Dual 2.5 Gigabit Ethernet
- Multiple I/Os, 2 x USB 3.2 Gen2x1, 2 x Serial Ports
- 12 V DC Power input



OVERVIEW



High-Performance Panel PC

Winmate's Open Frame Panel PC features Intel Alder Lake Processor, delivers outstanding computing power. This ensures seamless multitasking and efficient operation across a variety of applications.



Resistive Touch / Optional Protective Glass

To enhance operator convenience in industrial settings, Winmate's Open Frame Panel PC provides adaptable surface options. These include cover glass and a resistive touch screen to accommodate various specifications.



Low Power Consumption

Crafted for minimal power consumption and efficient heat dissipation, Winmate Open Frame Panel PC ensures durability for extended use in production facilities. It stands as the ultimate energy-efficient solution.



Versatile Mounting Solutions


Winmate provides users the flexibility to choose from various mounting solutions, including rear and VESA mounting, enabling them to select the most suitable option for their specific application.

SPECIFICATIONS

Display			
Resolution	1024x768	Size	10.4 inches
Contrast Ratio	1000:1	Panel Brightness	350.0 nits
View Angles	88,88,88,88	Active Area	210.4x157.8 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		
System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i5-1235U 3.3GHz(up to 4.40 GHz)	Memory	1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional)

Storage	1 x M.2 2280 M-Key NVMe SSD 256GB 512GB (Optional) 1TB (Optional) 2TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)
Mechanical			
Dimension	260 x 215 x 51 mm	Weight	1.9 kg
Mounting	Open frame Panel mount (Optional) VESA mount (Optional)	Enclosure	Metal Housing
Cooling System	Fanless Design		
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x 12V DC, 2.5φ DC jack	USB Port	2 x USB3.2 Gen2x1 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x HDMI 2.0 (Optional)
Audio	2 x Speaker	Expansion Port	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-KeySlot (for Wi-Fi Module)
LAN	2 x 2.5 Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord VESA screws		
Power			
Power Rating	12V DC	Adapter	12V 120W

DIMENSIONS UNIT:MM

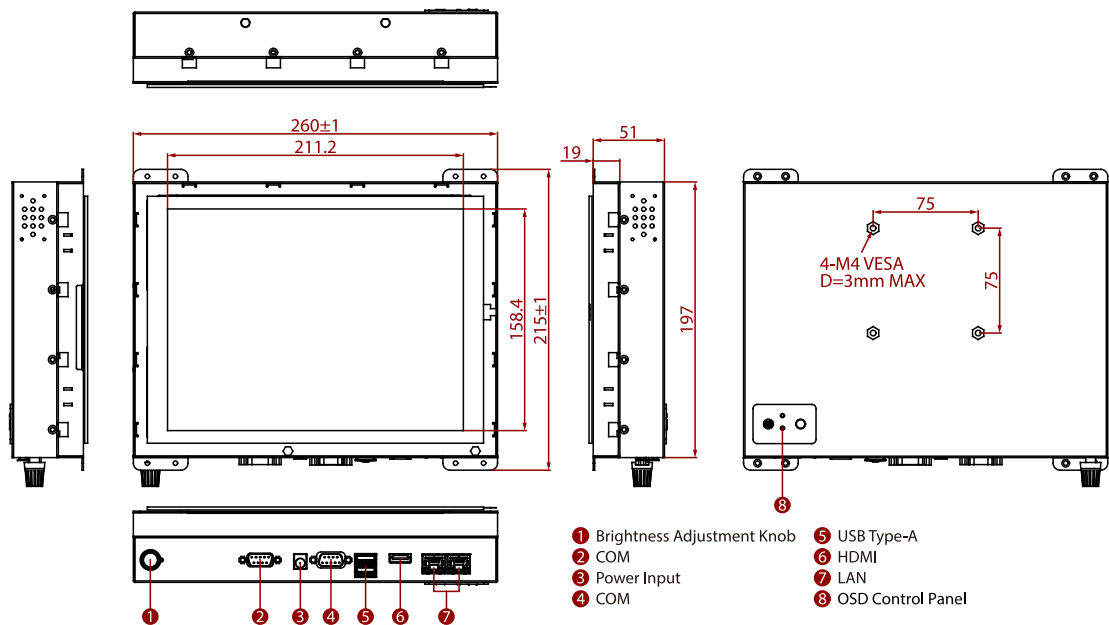

NOTE

1.This is a simplified drawing and some components are not marked in detail.
2.Please contact our sales representative if you need further product information.
3.All specifications are subject to change without prior notice.
4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.