

R10IAD3S-OFT2

10.4" Intel® Core™ i5-1235U Open Frame Panel PC



KEY FEATURES

- 10.4" 1024 x 768 Resolution Open Frame PC
- 12th Gen Intel® Core™ i5-1235U processor
- 1 x SODIMM, DDR5 4800MHz, support up to 32GB
- Integrated Dual 2.5 Gigabit Ethernet
- Multiple I/Os, 2 x USB 3.2 Gen2x1, 2 x Serial Ports
- 12 V DC Power input

INTRODUCTION

Winmate Open Frame Panel PC Series delivers versatility and performance for diverse industrial applications. Available in sizes from 5.7" to 24", these wide, rectangular panel PCs support multiple operating systems and advanced processors for seamless integration. Featuring resistive and PCAP touch options, they offer precise and intuitive operation. The open-frame design ensures easy installation into cabinets or kiosks, making them ideal for factory automation, retail, and interactive digital signage.

SPECIFICATIONS

Display

Resolution	1024x768	Size	10.4 inches
Contrast Ratio	1000:1	Panel Brightness	350.0 nits
View Angles	88,88,88,88	Active Area	210.4x157.8 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i5-1235U 3.3GHz(up to 4.40 GHz)	Memory	1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional)
Storage	1 x M.2 2280 M-Key NVMe SSD 256GB 512GB (Optional) 1TB (Optional) 2TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)

Mechanical

Dimension	260 x 215 x 51 mm	Weight	1.9 kg
Mounting	Open frame Panel mount (Optional) VESA mount (Optional)	Enclosure	Metal Housing
Cooling System	Fanless Design		

Environment

Operating Humidity 10% to 90% RH, Non-Condensing
 Storage Temperature -10°C to 60°C

Operating Temperature 0°C to 50°C

Certification

Certification CE, FCC

IO Ports

Power Input	1 x 12V DC, 2.5φ DC jack	USB Port	2 x USB3.2 Gen2x1 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x HDMI 2.0 (Optional)
Audio	2 x Speaker	Expansion Port	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-KeySlot (for Wi-Fi Module)
LAN	2 x 2.5 Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob		

Control

Button 1 x Power Button
1 x Reset Button


Accessory

Accessory 100~240V AC to DC Adapter
Power Cord
VESA screws

Power

Power Rating 12V DC Adapter 12V 120W

DIMENSIONS UNIT:MM

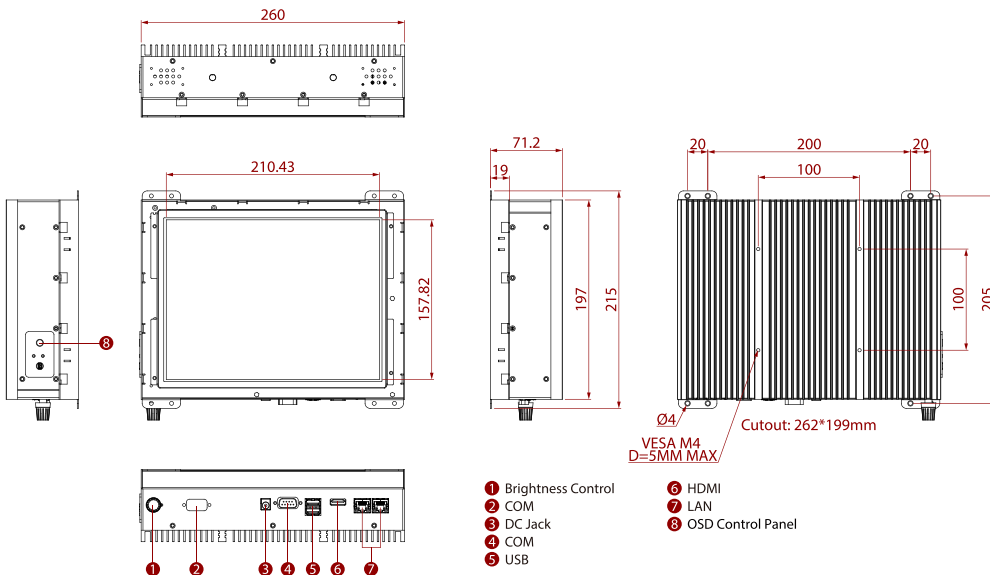

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.