

# W15IT7T-POA4

## 15.6" Intel® Core™ i5 (Tiger Lake) PO Series HMI Panel PC



### KEY FEATURES

- Intel® Core™ Tiger Lake UP3 i5-1135G7 (Without vPro) / Intel® Core™ Tiger Lake UP3 i5-1145G7E (With vPro)
- 1920 x 1080 Resolution
- Projected capacitive multi-touch screen
- Multi display supports DP / HDMI / LVDS / eDP panel interface
- Multiple I/Os, 2 x Serial Ports, 4 x USB 3.2 Gen. 1 Ports
- Front IP65 water and dust proof
- 12V Single Voltage Power Input



### OVERVIEW

#### PCAP TOUCH



#### Convenient Onscreen Operations with PCAP Multi-Touch

The Open Frame HMI panel PCs offer an ultimate touch experience with a projected capacitive (PCAP) multi-touch screen. This technology allows enjoying every touch and improving the convenience of using the device. Thus it helps to enhance the overall customer experience. Enjoy every touch and convenience of using the device!

#### APPLICATION-FOCUSED



#### Suitable for Condensed Spaces

The PO Series HMI panel PCs come with a sleek flat bezel and easy to mount open frame housing ideal for most industrial embedded and kiosk applications. The PO Series HMI panel PCs are targeted for banking, hospitals, retail, transportation, and other vertical markets.

#### RICH I/O PORTS



#### Rich I/O Interface for IoT Connectivity

The PO Series HMI panel PCs feature high performance and a rich I/O interface for innovative industrial IoT solutions, including serial ports, USB ports, LAN, video, and audio ports. Connectivity options, high performance, and installation-friendly design deliver excellent performance for vertical applications.

### SPECIFICATIONS

Display			
Resolution	1920x1080	Size	15.6 inches
Contrast Ratio	800:1	Panel Brightness	300.0 nits
View Angles	85,85,85,85	Active Area	344.16x193.59 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		
System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional) 2 x SO-DIMM, DDR4 3200 MHz, 4GB (Optional) 8GB (Optional) 16GB (Optional) 32GB (Optional) 64GB (Optional)
Storage	1 x M.2 M-Key 2280 NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller

<b>Security</b>	TPM 2.0	<b>Operating System</b>	*Note: Only Windows 11 support Wake on touch Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
-----------------	---------	-------------------------	---

<b>Mechanical</b>			
<b>Dimension</b>	392.2 x 268 x 65 mm	<b>Weight</b>	3.6 kg
<b>Mounting</b>	Open Frame Panel Mount VESA Mount	<b>Enclosure</b>	Metal Housing
<b>Cooling System</b>	Fanless design		
<b>Environment</b>			
<b>Operating Humidity</b>	10% to 90% RH, Non-Condensing	<b>Operating Temperature</b>	0°C to 50°C
<b>Storage Temperature</b>	-10°C to 60°C		

<b>Certification</b>			
<b>Certification</b>	CE, FCC		


<b>IO Ports</b>			
<b>Power Input</b>	1 x 12V DC, Din4 pin connector	<b>USB Port</b>	4 x USB3.2 Gen2x1 (Type-A)
<b>Serial Port</b>	1 x RS232/422/485 (Default RS232) 1 x RS232	<b>Video</b>	1 x DP1.4 1 x HDMI 2.0 (Optional)
<b>Audio</b>	Mic in Line out	<b>Expansion Port</b>	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module) 1 x PCIe 4.0 (x16) slot (x4 signal)
<b>LAN</b>	1 x Giga LAN RJ45 Connector 1 x 2.5 Giga LAN RJ45 Connector	<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for storage
<b>Brightness Knob</b>	1 x Brightness Adjustment Knob		

<b>Control</b>			
<b>Button</b>	1 x Power Button 1 x Reset Button		

<b>Accessory</b>			
<b>Accessory</b>	100~240V AC to DC Adapter Power Cord VESA screws		

<b>Power</b>			
<b>Power Rating</b>	12V DC	<b>Adapter</b>	12V 120W

**DIMENSIONS** UNIT:MM

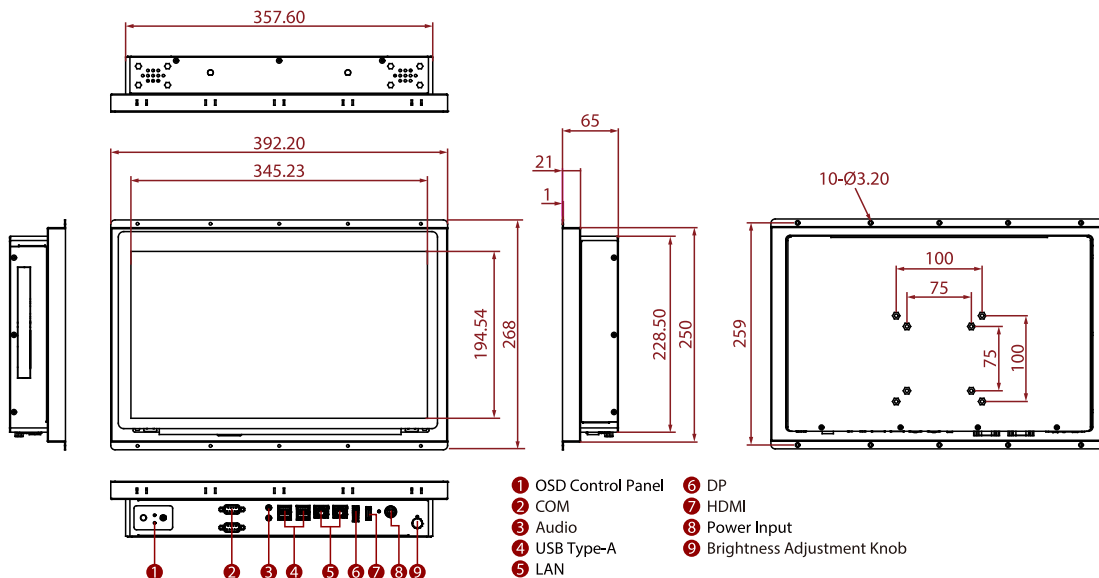

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.