

# R15L100-STC3

## 15" Stainless Panel Mount Display



### KEY FEATURES

- 15", 1024 x 768
- VGA and HDMI input
- Panel mount
- VESA mount



### OVERVIEW



#### Resistive Touch / Anti-reflective Protection Glass

The display is highly resistant to cold temperatures, wet fingers, and dusty conditions. Plus, the protective glass serves to protect the display against sharp foreign objects, meaning the screen is still operable even with scratches on the surface.



#### Dust and Water Resistant

The display complies with IP65 water and dust resistance for regular cleanup processes and strict hygiene standards in the Food, Beverage, and Pharmaceutical industries.



#### Outstanding Image Quality

Sophisticated timeless design coupled with Winmate expertise in industrial computers and touchscreen not only offers you a top product at an attractive cost but also gives you a sense of technical superiority and the future. Winmate display modules are perfectly assembled in the clean room for easy further processing.



#### Display Ports and Customization

Winnate provides a wide range of customization options to meet your requirements, including product size, customer logo, LCD panel brightness, glass cover surface treatment, display ports, and many more. The power plug is selected according to the different styles of each country. [Contact our team](#) for more information.


### SPECIFICATIONS

Display			
Resolution	1024x768	Size	15 inches
Contrast Ratio	2000:1	Panel Brightness	300 nits
Display Color	16.2M Colors	View Angles	88,88,88,88
Active Area	304.1x228.1 mm	Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)
Mechanical			
Dimension	396 x 316 x 56.8 mm	Mounting	Panel mount VESA Mount
Enclosure	Stainless front bezel	Cooling System	Fanless design
Environment			

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C	IP rating	Front IP65
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x 12V DC, 2.5φ DC jack	USB Port	1x USB type-A for touch screen control (Optional)
Serial Port	1 x RS232 D-sub9 for touch screen control (Optional)	Video	1x VGA input 1x HDMI input (Optional) 1x DVI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord External USB Cable For Touchscreen Control External VGA Cable External HDMI Cable VESA Screws	Optional Accessory	External DVI Cable (Optional)
Power			
Power Rating	12V DC		

DIMENSIONS

UNIT:MM

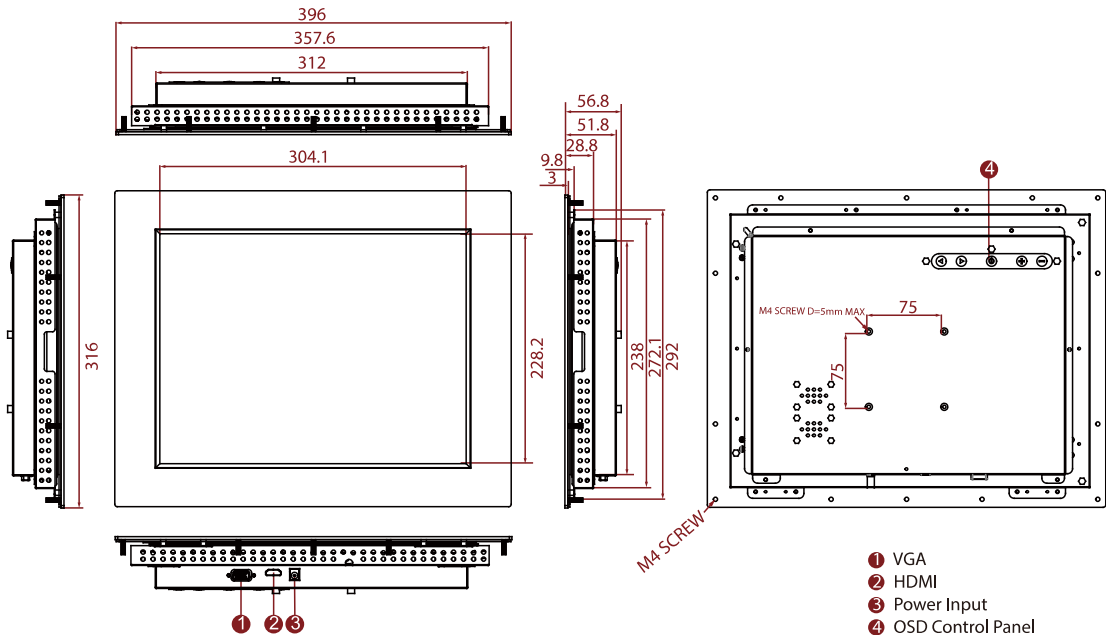

- NOTE**
1. This is a simplified drawing and some components are not marked in detail.
  2. Please contact our sales representative if you need further product information.
  3. All specifications are subject to change without prior notice.
  4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.