

# Storage SuperServer SSG-221E-NE324R

2U front-loading all-flash storage server with 24 E3.S NVMe drives and PCIe 5.0



[More details here](#)

## Key Applications

Software-defined Storage, In-Memory Computing, Data Intensive HPC, Private & Hybrid Cloud, NVMe Over Fabrics Solution,


## Key Features

- Dual Socket E (LGA-4677) 5th/4th Generation Intel® Xeon® Scalable processors. Up to 350W TDP.;
- Supports 32 DIMMs with 2DPC, up to 8TB memory capacity with 32 DIMMs of 256GB 3DS RDIMM DDR5-5600 ECC memory;
- Two PCIe 5.0 x16 slots & two PCIe x8 slots and two AIOM connectors (OCP 3.0 SFF compliant);
- 24x hot-swap E3.S (7.5mm) NVMe drive bays;
- Redundant Titanium 2000W Power Supplies;




Form Factor	2U Rackmount Enclosure: 438.4 x 89.8 x 789.9mm (17.2" x 3.5" x 30.8") Package: 673.1 x 254 x 1098.55mm (26.5" x 10" x 43.25")
Processor	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors
System Memory	Slot Count: 32 DIMM slots Max Memory (2DPC): Up to 8TB 5600MT/s ECC DDR5 RDIMM/LRDIMM
Drive Bays Configuration	Default: Total 24 bays <ul style="list-style-type: none"> <li>• 24 front hot-swap E3.S 1T NVMe drive bays</li> </ul> M.2: 2 M.2 NVMe/SATA slots (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 4 PCIe 5.0 x8 FHHL slots</li> <li>• 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)</li> </ul> Option A <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x8 FHHL slots</li> <li>• 1 PCIe 5.0 x16 FHHL slot</li> <li>• 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)</li> </ul> Option B <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x16 FHHL slots</li> <li>• 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)</li> </ul>
On-Board Devices	Chipset: Intel® C741 Network Connectivity: Via AIOM

(Front View – System)

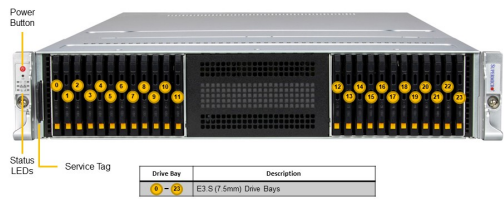

(Rear View – System)

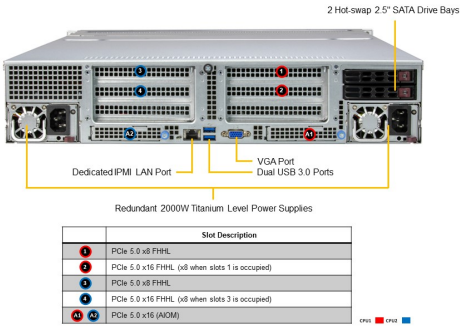

System Cooling	Fans: 4 Heavy Duty 8cm Fan(s)
Power Supply	1x 2000W Redundant Titanium Level (96%) power supply
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 7 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 77 lbs (34.93 kg) Net Weight: 55 lbs (24.95 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	<a href="#">Super X13DSF-A</a>
Chassis	CSE-236E3-R2K08P