

# W22L100-SPA369

## 21.5" IP69K Stainless PCAP Chassis Display



### KEY FEATURES

- 21.5", 1920 x 1080, PCAP touch with flat design
- Full IP69K waterproof enclosure, good corrosion resistance
- SUS 316/ AISI 316 stainless steel for food and chemical industries
- Support VESA / YOKE mount



### SPECIFICATIONS


Display	
<b>Resolution</b>	1920x1080
<b>Contrast Ratio</b>	3000:1
<b>Display Color</b>	16.7M Colors
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen
<b>Size</b>	21.5 inches
<b>Panel Brightness</b>	250 nits
<b>View Angles</b>	89,89,89,89
Mechanical	
<b>Dimension</b>	541 x 337 x 56.2 mm
<b>Enclosure</b>	Stainless Housing
<b>Mounting</b>	VESA Mount Yoke Mount
<b>Cooling System</b>	Fanless design
Environment	
<b>Operating Humidity</b>	10% to 90% (non-condensing)
<b>Storage Temperature</b>	-20~60°C
<b>Operating Temperature</b>	0~45°C
<b>IP rating</b>	IP69K
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>USB Port</b>	1 x M12 waterproof connector for touch screen control
<b>Video</b>	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x M21 type connector for HDMI input (Optional)
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for status
Control	
<b>Button</b>	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
Accessory	
<b>Accessory</b>	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector for touchscreen control External VGA cable with waterproof connector
<b>Optional Accessory</b>	External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector (Optional)

Waterproof caps  
Manual  
VESA screws

## Power

Power Rating 12V DC (M12 type)

## DIMENSIONS UNIT:MM

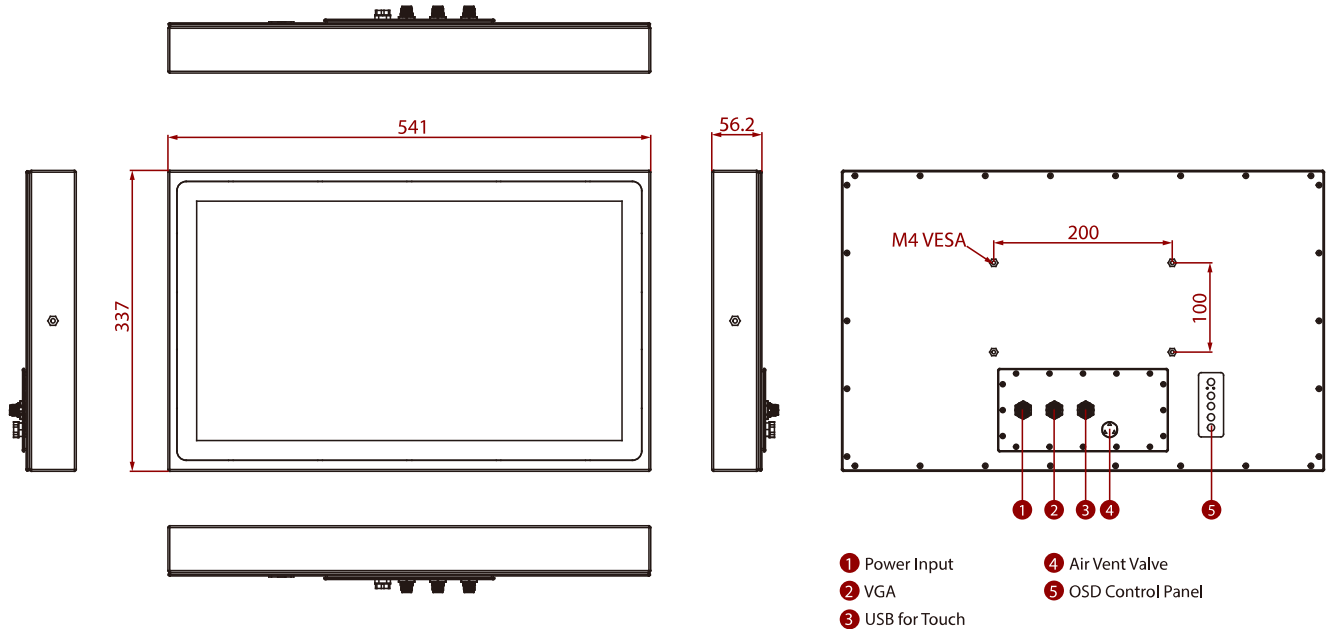

- ① Power Input
- ② VGA
- ③ USB for Touch
- ④ Air Vent Valve
- ⑤ OSD Control Panel