

HMI Panel PC

Model:R19FA3S-IPM1HM

Product Features:

- 19" 1280 x 1024 TFT LCD with resistive touch screen
- Freescale Cortex A9 i.MX6 Dual Core 1GHz (Optional Quad Core)
- Onboard LPDDR3 1 GB (Optional for 2GB)
- Onboard 16GB eMMC Flash
- 1 x USB 2.0; 1 x RS-232/422/485; 1 x Micro SD Slot, 1 x Mini USB, 1 x Micro HDMI
- Fanless and Ultra-low power consumption



Front IP65



Fanless




IP65/ NEMA4


Product Specifications:

System Specification	Processor	Freescale Cortex A9 i.MX6 Dual Core 1GHz (Optional Quad Core)
	Memory	1GB LPDDR3 (Optional for 2 GB)
Display Specification	Storage	Onboard 16GB eMMC (Default) Micro SD card
	Operating System	Android 6.0 (Default) Linux 4.1.15 , QT 5.5 (Optional) Ubuntu 16.04 (Optional)
Input / Output	Size/Type	19" TFT(LED Backlight)
	Resolution (pixels)	1280 x 1024
Power	Brightness (cd/m ²)	250 cd/m ²
	Touch interface	Resistive Touch
Environment	Serial Interface	1 x RS-232/422/485
	USB Port	1 x USB 2.0, 1 x USB OTG
Mechanical Design:	Ethernet Port	1 x RJ45, 10/100/1000 LAN
	SD Card	1 x Micro SD Card Slot
I / O View:	CANBUS	1 x CANBUS
	Power Input	1 x Terminal Block 2 Pin (Phoenix Type)
Bottom View	Console	1 x Mini USB
	Micro HDMI	1 x Micro HDMI
Cut Out Dimension	Power Input	12V DC
	Power consumption	20W
Note	Operating Temperature	0 deg.C to 50 deg.C
	Storage Temperature	-10 deg.C to 60 deg.C
	Humidity	10% to 90% (non-condensing)

Mechanical Design:

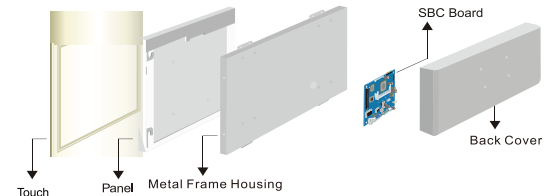

I / O View:

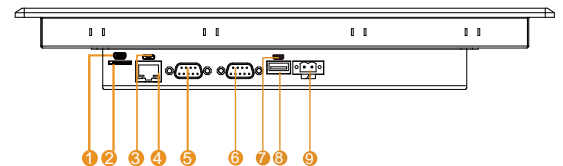

1. Console Port (Mini USB)
2. Micro SD
3. LAN
4. USB OTG
5. RS-232/422/485
6. CANBUS
7. Micro HDMI
8. 1 x USB 2.0
9. 12V DC (2pin Phoenix type)

Dimensions:

