


IDK-1110W

10.1" WSVGA Industrial Display kit with Touch Solution

NEW

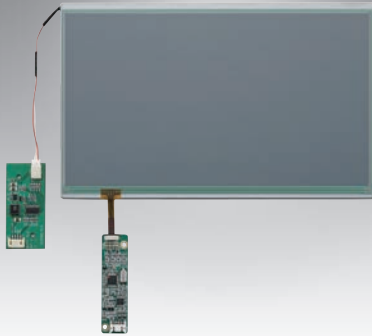

Features

- 10.1" LCD supports 1024 x 600 pixels and wide operating temperature (-5~ 60° C)
- Brightness of 550 cd/m² with LED backlight
- 4-wire resistive touch solution
- High contrast ratio of 500:1
- High uniformity of 85%
- LVDS signal interface
- Low power consumption 8.99 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- AR surface treatment (optional)
- Optical bonding (optional)

Introduction

The Advantech IDK-1110W series comes with a 10.1" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-1110W series supports 4-wire resistive touch with low power consumption at the maximum of 8.99 W. IDK-1110W series is ideal for embedded applications which customers have maximum flexibility for mechanical design.

Specifications

Display	Display Size	10.1" LED backlight panel (WSVGA)
	Resolution	1024 x 600
	Viewing Angle (U/D/L/R)	70° / 50° / 70° / 70°
	Brightness	550 cd/m ²
	Backlight Life (hrs)	50,000hrs
	Contrast Ratio	500 : 1
	Response Time (ms)	25 ms
	Colors	6 Bit (262K)/8 bit (16.2 M)
	Voltage	3.3 V Power
	Consumption	8.99 W
	Signal Interface	1 channel LVDS
	Weight	420 g
Dimensions (W x H x D)	235 x 145.8 x 10.25 mm	
Touchscreen	Touch Screen	4-wire Resistive
	Transparency	82.5± 2.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-5 ~ 60° C
	Storage Temperature	-20 ~ 70° C
	Humidity	10 ~ 90% @ Max. 25° C, non-condensing

