

# TGAR-1062+-4G6S-M12

## Industrial EN50155 IEEE 802.11 a/b/g/n 4G LTE Cellular Router With 2x10/100/1000Base-T(X), 1-port PoE P.D, M12 connector

### Features

- Leading EN50155-compliant wireless access point for rolling stock application
- High Speed Air Connectivity: WLAN interface support up to 300Mbps link speed
- Highly Security Capability: WEP/WPA/WPA-PSK(TKIP,AES)/WPA2/WPA2-PSK(TKIP,AES)/802.1X Authentication supported
- Secured Management by HTTPS
- Various kind of WAN Connection Type supported: Dynamic/Static IP, PPPoE, Modem Dial Up
- IP table configurable to prevent access from unauthorized IP address
- Support VPN for secured network connection (Open VPN , PPTP VPN)
- Support NAT Setting (Virtual Server , Port Trigger , DMZ , UPnP)
- Support DHCP forwarding through PPTP function
- Category 6 LTE Modem dial up included
- GPS support for GPS model.
- 1KV isolation for PoE P.D. port
- Event Warning by Syslog, Email, SNMP Trap and Relay output
- Ultra rugged enclosure for toughest industrial usages
- Wall mounting enabled



### Introduction

ORing's Transporter™ series cellular router is designed for industrial and rolling stock wireless applications, such as vehicle, and railway applications. TGAR-1062+-4G6S-M12 is reliable IEEE802.11 a/b/g/n router with 2 ports LAN which is fully compliant with EN50155 certification. It could be configured to operate in 3 modes of routing function: Dynamic/Static IP route, PPPoE authentication, and Cellular modem dial up. Users can set up WLAN environment to fulfill demands of various applications rapidly by dialing up cellular modem. TGAR-1062+-4G6S-M12 EN50155 cellular VPN router use M-series connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. In addition, TGAR-1062+-4G6S-M12 also provides P.D. feature on ETH2 which is fully compliant with IEEE802.3af PoE P.D. specification and TGAR-1062+-4GS-M12 supports GPS function. Therefore, TGAR-1062+-4G6S-M12 is one of the most reliable choices for rolling stock applications on the wireless network.

## Application


In TGAR-1062+-4G6S-M12 , there are 3 modes of routing functions supported: Dynamic/Static IP route, PPPoE dial up, and Modem dial up. TGAR-1062+-4G6S-M12 also support NAT, VPN and Back up functions. You can build up the wireless network and connect to the Internet easily.

## Pin Definition


### Relay Output



### Console

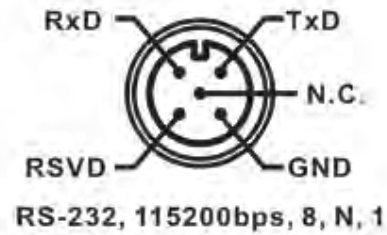


### DI

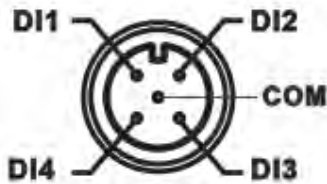


### DO



### Power

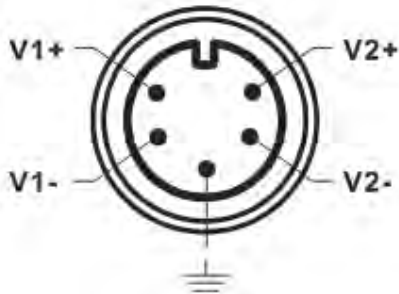


### Ethernet

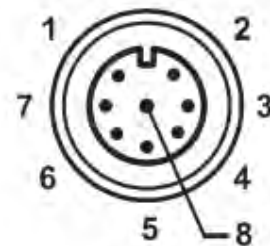


- 1 BI\_DC+
- 2 BI\_DD+
- 3 BI\_DD-
- 4 BI\_DA-
- 5 BI\_DB+
- 6 BI\_DA+
- 7 BI\_DC-
- 8 BI\_DB-

# Dimension

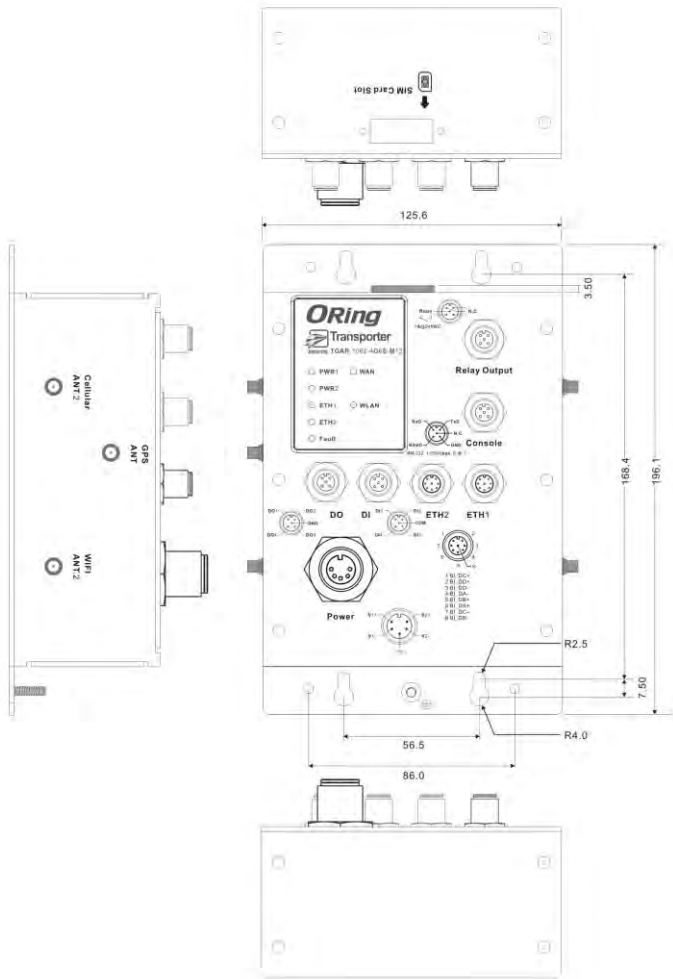

Dimension (Unit =mm)

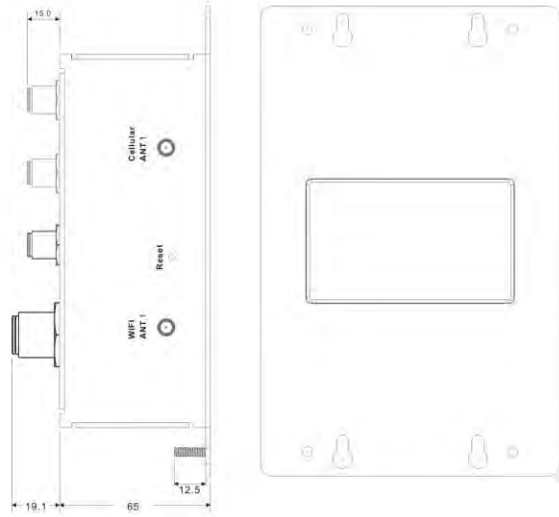


## Specifications

|   |  |
|---|--|
| <b>ORing EN50155 WLAN<br/>Access Point Router Model</b>             | <b>TGAR-1062+4G-M12</b>  |
| <b>Physical Ports</b>   |  |
| 10/100/1000Base-T(X) Ports in M12<br>Auto MDI/MDIX (8-pin A-coding) | <b>2</b> (Present at ETH2<br>Fully compliant with IEEE 802.3af PoE P.D )   |
| DIDO port in M12 (5-pin A-coding)                                   | <b>2(DI x 4 and DO x 4) :</b><br>Dry Contact:<br>On: short to GND, Off: open<br>Wet Contact (DI to COM/GND):<br>On: 0 to 3VDC, Off: 10 to 30VDC  |
| RS-232 Console port in M12<br>(5-pin A-coding)                      | <b>115200, 8 ,N ,1</b>   |
| Relay port in M12 (5-pin A-coding)                                  | <b>1A@24VDC</b>  |
| SIM Card Slot   | <b>1 (Mini SIM only without adapter)</b>   |
| <b>GPS (-4GS model only)</b>  |  |
| Antenna Connector   | 1 x External reverse SMA antenna connector   |
| Frequency   | 1575.42MHz   |
| <b>WLAN Interface</b>   |  |
| Antenna Connector   | 2 x Reverse SMA Female   |
| Radio Frequency Type  | DSSS, OFDM   |
| Modulation  | IEEE802.11a : OFDM with BPSK, QPSK, QAM, 64QAM<br>IEEE802.11b: CCK, DQPSK, DBPSK<br>IEEE802.11g: OFDM with BPSK, QPSK, 16QAM, 64QAM<br>IEEE802.11n : BPSK, QPSK, 16-QAM, 64-QAM  |
| Frequency Band  | America / FCC : 2.412~2.462 GHz (11 channels)<br>5.180~5.240 GHz & 5.745~5.825 GHz ( 9 channels )<br>Europe CE / ETSI : 2.412~2.472 Ghz (13 channels)<br>5.180~5.240 GHz (4 channels)  |
| Transmission Rate   | IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps<br>IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps<br>IEEE801.11n: up to 300Mbps  |
| Transmit Power  | 802.11a: 12dBm ± 1.5dBm@54Mbps<br>802.11b: 17dBm ± 1.5dBm@11Mbps<br>802.11g: 16dBm ± 1.5dBm@54Mbps<br>802.11gn HT20: 15dBm ± 1.5dBm @MCS7<br>802.11gn HT40: 14dBm ± 1.5dBm @MCS7<br>802.11an HT20: 12dBm ± 1.5dBm @MCS7<br>802.11an HT40: 11dBm ± 1.5dBm @MCS7 |
| Receiver Sensitivity  | 802.11a : -76dBm ± 2dBm@54Mbps<br>802.11b : -85dBm ± 2dBm@11Mbps<br>802.11g : -76dBm ± 2dBm@54Mbps<br>802.11gn HT20: -75dBm ± 2dBm@MCS7<br>802.11gn HT40: -72dBm ± 2dBm@MCS7<br>802.11an HT20: -74dBm ± 2dBm@MCS7<br>802.11an HT40: -71dBm ± 2dBm@MCS7         |
| Encryption Security   | WEP: (64-bit ,128-bit key supported)<br>WPA/WPA2 :802.11i(WEP and AES encryption)<br>WPAPSK (256-bit key pre-shared key supported)<br>802.1X Authentication supported<br>TKIP encryption   |
| Wireless Security   | <b>SSID broadcast disable</b>  |
| <b>Cellular Interface</b>   |  |
| Cellular Standard   | GSM / GPRS/ EGPRS/ EDGE / WCDMA / HSDPA / HSUPA /HSPA+ /LTE  |
| Antenna Connector   | 2 x SMA Female   |
| Band Option   | <b>Asia/Australia</b><br>LTE:<br>FDD: B1/B3/B5/B7/B8/B18/B19/B21/B28 Band  |

|                                     |  |
|-------------------------------------|--|
|                                     | <p>TDD: B38/B39/B40/B41 Band</p> <p>TD-SCDMA:<br/>B39 Band</p> <p>UMTS/HSDPA/HSUPA/HSPA+/DC-HSPA+:<br/>B1/B5/B6/B8/B9/B19 Band</p> <p><b>American/Europe</b></p> <p>LTE:<br/>FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B20/B25/B26/B29/B30 Band<br/>TDD: B41 Band</p> <p>UMTS/HSDPA/HSUPA/HSPA+/DC-HSPA+:<br/>B1/B2/B3/B4/B5/B8 Band</p> |
| <b>Protocol Support</b>             |  |
| Protocol                            | ARP, BOOTP, DHCP, DNS, HTTP, IP, ICMP, SNMP, TCP, UDP, RADIUS, SNMP, PPPoE   |
| <b>LED Indicators</b>               |  |
| Power Indicator                     | 2 x LEDs,<br>PW1: Green for DC Power on<br>PW2: Green for DC Power on or power by PoE  |
| 10/100/1000Base-T(X) port Indicator | 2 x LEDs, Green for port Link/Act  |
| WLAN LED                            | 1 x LED, Green for WLAN Link/Act   |
| WAN LED                             | 1 x LED, Green for functioning normal  |
| Fault Indicator                     | 1 x LED, Red for Ethernet link down or power down indicator  |
| <b>Fault Contact</b>                |  |
| Relay                               | Relay output to carry capacity of 3A at 24VDC  |
| <b>Power</b>                        |  |
| Redundant Input Power               | Dual Power Inputs with M23 connector. Nominal 24/48Vdc(12~48Vdc)   |
| Power Consumption (Typ.)            | 10.5Watts  |
| Overload Current Protection         | Present  |
| Reverse Polarity Protection         | Present  |
| <b>Physical Characteristic</b>      |  |
| Enclosure                           | IP-40  |
| Dimension (W x D x H)               | 125.6(W) x 65(D) x 196.1(H) mm (4.94 x 2.55 x 7.72 inch.)  |
| Weight (g)                          | 980g   |
| <b>Environmental</b>                |  |
| Storage Temperature                 | -40 to 85°C (-40 to 185°F)   |
| Operating Temperature               | -25 to 70°C (-13 to 158°F)   |
| Operating Humidity                  | 5% to 95% Non-condensing   |
| <b>Regulatory Approvals</b>         |  |
| EMI                                 | FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2)  |
| EMS                                 | EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11   |
| Shock                               | IEC60068-2-27, EN61373   |
| Free Fall                           | IEC60068-2-31  |
| Vibration                           | IEC60068-2-6, EN61373  |
| Rail Traffic                        | EN50155  |
| Cooling                             | EN60068-2-1  |
| Dry Heat                            | EN60068-2-2  |
| Safety                              | EN60950-1  |
| <b>Warranty</b>                     | 5 years  |

## Ordering Information

TGAR-**ABCDE**-**FFFG**-M12

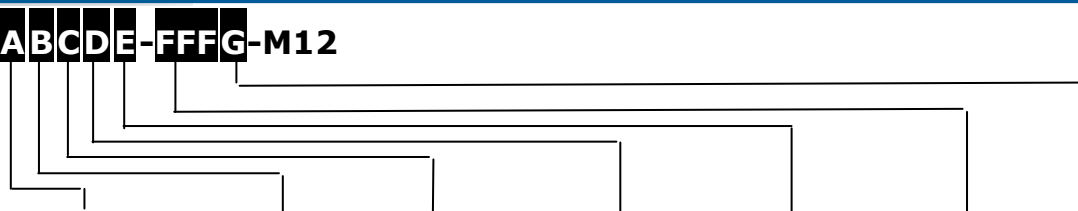

| Code Definition | Cellular Module Number | 2 <sup>nd</sup> Wireless Mode  | 1 <sup>st</sup> Wireless Mode  | Giga Ethernet Port Number | PoE Identification              | Cellular Generation / Category                 | GPS Function |
|-----------------|------------------------|--|--|---------------------------|---------------------------------|--|--------------|
| Option          | 1: One<br>2: Dual      | 1: 802.11 b/g<br>2: 802.11 a<br>3: 802.11 a/b/g<br>4: 802.11 b/g/n<br>5: 802.11 a/n<br>6: 802.11 a/b/g/n | 1: 802.11 b/g<br>2: 802.11 a<br>3: 802.11 a/b/g<br>4: 802.11 b/g/n<br>5: 802.11 a/n<br>6: 802.11 a/b/g/n | 2: 2 ports                | -"+" : PoE P.D. present at ETH2 | 4G :LTE under Category 6<br>4G6:LTE Category 6 | S:GPS        |

| Model Name      | Description            |   |
|-----------------|------------------------|---|
| Available Model | TGAR-1062+-4G6S-M12_US | Industrial EN50155 IEEE 802.11 a/b/g/n 4G LTE Cellular Router With 2x10/100/1000Base-T(X), 1-port PoE P.D, M12 connector, US Band |
|                 | TGAR-1062+-4G6S-M12_EU | Industrial EN50155 IEEE 802.11 a/b/g/n 4G LTE Cellular Router With 2x10/100/1000Base-T(X), 1-port PoE P.D, M12 connector, EU Band |
|                 | TGAR-1062+-4G6S-M12_CN | Industrial EN50155 IEEE 802.11 a/b/g/n 4G LTE Cellular Router With 2x10/100/1000Base-T(X), 1-port PoE P.D, M12 connector, CN Band |
|                 | TGAR-1062+-4G6S-M12_TW | Industrial EN50155 IEEE 802.11 a/b/g/n 4G LTE Cellular Router With 2x10/100/1000Base-T(X), 1-port PoE P.D, M12 connector, TW Band |

## Packing List

- TGAR-1062+-4G6S-M12 x 1
- CD x 1
- Quick Installation Guide x 1
- 2.4GHz/5GHz Antenna x 2
- LTE Antenna x 2

## Optional Accessories

- DR-45 series : 45 Watts power supply
- DR-75 series : 75 Watts power supply
- DR-120 series : 120 Watts power supply
- WLAN RF Antenna series
- RF Antenna Base series
- RF Cable series