

# ADAM-6317


# ADAM-6350

# ADAM-6360D

IoT OPC UA Ethernet I/O - AI Module

IoT OPC UA Ethernet I/O - DI/O Module

IoT OPC UA Ethernet I/O - SSR Relay Output Module

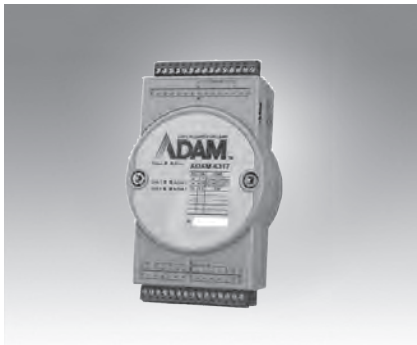

ADAM-6317



ADAM-6350



ADAM-6360D



## Specifications

### Analog Input

- Channels 8 (differential)
- Sampling Rate 10 or 100 samples/ second (total)
- Resolution 16 bits
- Input Range 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, ±150 mV, ±500 mV, ±1V, ±5 V, ±10 V, ±20 mA, 0 ~ 20 mA, 4 ~ 20mA

### Digital Input

- Channels 11
- Dry contact logic 0: Open  
logic 1: Closed to ground
- Wet contact logic 0: 0 ~ 3 V<sub>DC</sub>  
logic 1: 10 ~ 30 V<sub>DC</sub>
- DI5~DI10 support 3 kHz counter input
- DI5~DI10 support 3 kHz frequency input

### Digital Output

- Channels 10
- Output type Sink type, 30 V<sub>DC</sub>, 0.1A max. per channel
- D04~D09 support 3 kHz pulse output

## Specifications

### Digital Input

- Channels 18
- Dry contact logic 0: Open  
logic 1: Closed to ground
- Wet contact logic 0: 0 ~ 3 V<sub>DC</sub>  
logic 1: 10 ~ 30 V<sub>DC</sub>
- DI12~DI17 support 3 kHz counter input
- DI12~DI17 support 3 kHz frequency input

### Digital Output

- Channels 18
- Output type Sink type, 30 V<sub>DC</sub>, 0.1A max. per channel
- D012~D017 support 3 kHz pulse output

## Specifications

### Relay Output (PhotoMOS SPST)

- Channels 8 (Form A)
- Contact rating 1 A @25°C @30 V<sub>DC</sub>  
(Resistive and Inductive load)  
0.7A @70°C @30 V<sub>DC</sub>
- Relay-on time 1.3 ms
- Relay-off time 0.8 ms
- Isolation (Relay output to power) 1500Vrms
- Peak Load Current 4A (100ms (1 pulse))
- Total Power Dissipation 400mW / channel
- On-state resistance 0.5Ω

### Digital Input

- Channels 14
- Dry contact logic 0: Open  
logic 1: Closed to ground
- Wet contact logic 0: 0 ~ 3 V<sub>DC</sub>  
logic 1: 10 ~ 30 V<sub>DC</sub>
- DI8~DI13 support 3 kHz counter input
- DI8~DI13 support 3 kHz frequency input

### Digital Output

- Channels 6
- Output type Sink type, 30 V<sub>DC</sub>, 0.1A max. per channel
- D00~D05 support 3 kHz pulse output

## Common Specifications

### General

- Power input 10 ~ 30 V<sub>DC</sub>
- Power Consumption 2.9 W @ 24 V<sub>DC</sub> (ADAM-6317)  
2.8 W @ 24 V<sub>DC</sub> (ADAM-6350)  
2.8 W @ 24 V<sub>DC</sub> (ADAM-6360D)
- LAN port 2 x RJ-45 10/100 Mbps
- Connectors 2 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- Watchdog System and Communication
- Protocol OPC UA, Modbus

### Protection

- Isolation 2,500 V<sub>DC</sub>
- Power Reversal Protection

### OPC UA

- Max Monitored Items 600 (including all sessions)
- Max Sessions 4 (including security or non-security session)
- Max Subscriptions per Session 1
- Support security/certificate management

### Modbus/TCP

- Modbus/TCP connection 4

### Environment

- Operating Temperature -25° C ~ 70° C
- Storage Temperature -25° C ~ 85° C
- Operating Humidity 20 ~ 95% RH (non-condensing)  
0 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

## Ordering Information

- ADAM-6317-A1 OPC UA and Security Remote I/O - AI Module
- ADAM-6350-A1 OPC UA and Security Remote I/O - DI/O Module
- ADAM-6360D-A1 OPC UA and Security Remote I/O - SSR Relay Output Module