


# ASMB-588

## LGA 1700 Intel® 13th/ 12th Gen. Core™ MicroATX Server Board with 4 x DDR5, 3 x PCIe (1 x Gen 5, 2 x Gen 4), 6 x USB 3.2, 5 x SATA3, Quad/Dual LANs, and IPMI

**NEW**

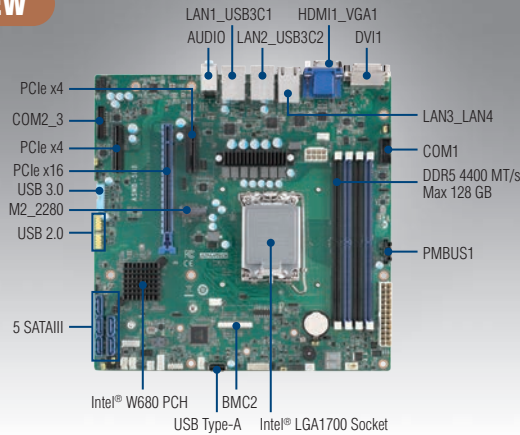

CE FCC

### Features

- LGA 1700 Intel® 13th/ 12th Gen. Core™ i9/i7/i5/i3 processors with W680 chipset
- DDR5 ECC/Non-ECC 4400/4000/3600 MT/s UDIMM up to 128 GB
- One PCIe x16 (Gen 5) and two PCIe x4 (Gen 4) slots
- Triple displays - DVI-D, VGA, and HDMI 2.0 ports
- Five SATA 3 ports and six USB 3.2 ports
- One M.2 2280 (PCIe x4)
- Rackmount optimized placement with positive air flow design
- 0 ~ 60 °C (32 ~ 140 °F) ambient operating temperature range

Note: Supported OS including Windows 10/ 11 (64-bit) and Server 2022 (64-bit) have been validated.


### Specifications

Form Factor	Micro ATX form factor					
Processor System	Socket	Intel® LGA 1700				
	CPU type	13th/ 12th Gen Intel® Core™ i9/i7/i5/i3 series processors (TDP up to 125W)				
Core Logic	Chipset	Intel® W680 chipset				
	Total slots	4 (Dual Channel)				
Memory	Capacity	Maximum 128 GB				
	Memory type	DDR5 ECC*/Non-ECC 4400**/4000/3600 MT/s UDIMM (288-pin)				
	Memory size	8 GB, 16 GB, 32 GB				
Expansion Slots	Total PCIe slots	3				
	Slot location 1	-				
	Slot location 2	-				
	Slot location 3	-				
	Slot location 4	PCIe x4 slot (Gen 4 x4 link)				
	Slot location 5	-				
	Slot location 6	PCIe x16 slot (Gen 5 x16 link)				
Graphics	Slot location 7	PCIe x4 slot (Gen 4 x4 link)				
	Controller	Intel® HD Graphics				
Storage	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed				
	SATA controller	Intel® W680: 5 SATA3 6Gb/s ports with Rapid Storage Technology support (for Windows only) (Supports software RAID 0, 1, 10 & 5)				
Networking	SAS controller	-				
	GbE LAN	1 x Intel® I219LM + 3 x Intel® I210AT				
Onboard I/O Connector	LPT connector	-				
	PSU connector	24-pin SSI power connector + 8-pin SSI 12 V power connector				
	USB connector	7, 1 x USB 3.2 Gen 1 (2 ports), 2 x USB 2.0 (4 ports), 1 x USB 2.0 Type-A				
	M.2 connector	1 x M.2 2280 (PCIe)				
	Fan header	5 x (4-pin)				
	SMBus	1				
	Chassis intrusion	1				
	Front LAN LED	2				
	Serial port header	2, 1 x RS-232 dual-port (2 ports)				
	Audio Header	1 x (ALC 888S)				
	PS/2 KB/Mouse	-				
	Rear I/O Connector	External serial port	1 (via COM cable in the package)			
External USB port		4 x (USB 3.2 Gen 2)				
VGA port		1 x (Resolution up to 1920 x 1200 @ 60 Hz)				
DVI port		1 x (Resolution up to 1920 x 1200 @ 60 Hz)				
HDMI		1 x (Resolution up to 4096 x 2160 @ 60 Hz)				
RJ-45		4				
PS/2 KB/mouse		-				
Power Requirement	Audio	2 x (Mic-in , Line-out)				
	Power On	3.3 V	5 V	12 V	12V_8P	5 V <sub>SB</sub>
	(Core i9-12900K 3.2GHz DDR5 4800 16 GB x 4)	0.76 A	0.92 A	0.03 A	4.82 A	0.15 A
Environment	Temperature	Operating			Non-operating	
	Humidity	0 ~ 60 °C, depends on CPU speed and cooler solution			-40 ~ 85 °C	
Watchdog Timer	Output	40 °C @ 95% RH Non-condensing				
	Interval	60 °C @ 95% RH Non-condensing				
Physical Characteristics	System reset	System reset				
	Interval	Programmable 1 ~ 255 sec/min				
Dimensions	Programmable 1 ~ 255 sec/min	244 x 244 mm (9.6 x 9.6 in)				
	Dimensions	244 x 244 mm (9.6 x 9.6 in)				

\* ECC will not be supported when paired with Core i3 processors.

\*\* 4400MT/s can only be supported with 1 DIMM per channel configuration (2 DIMMs in total).

### Block Diagram

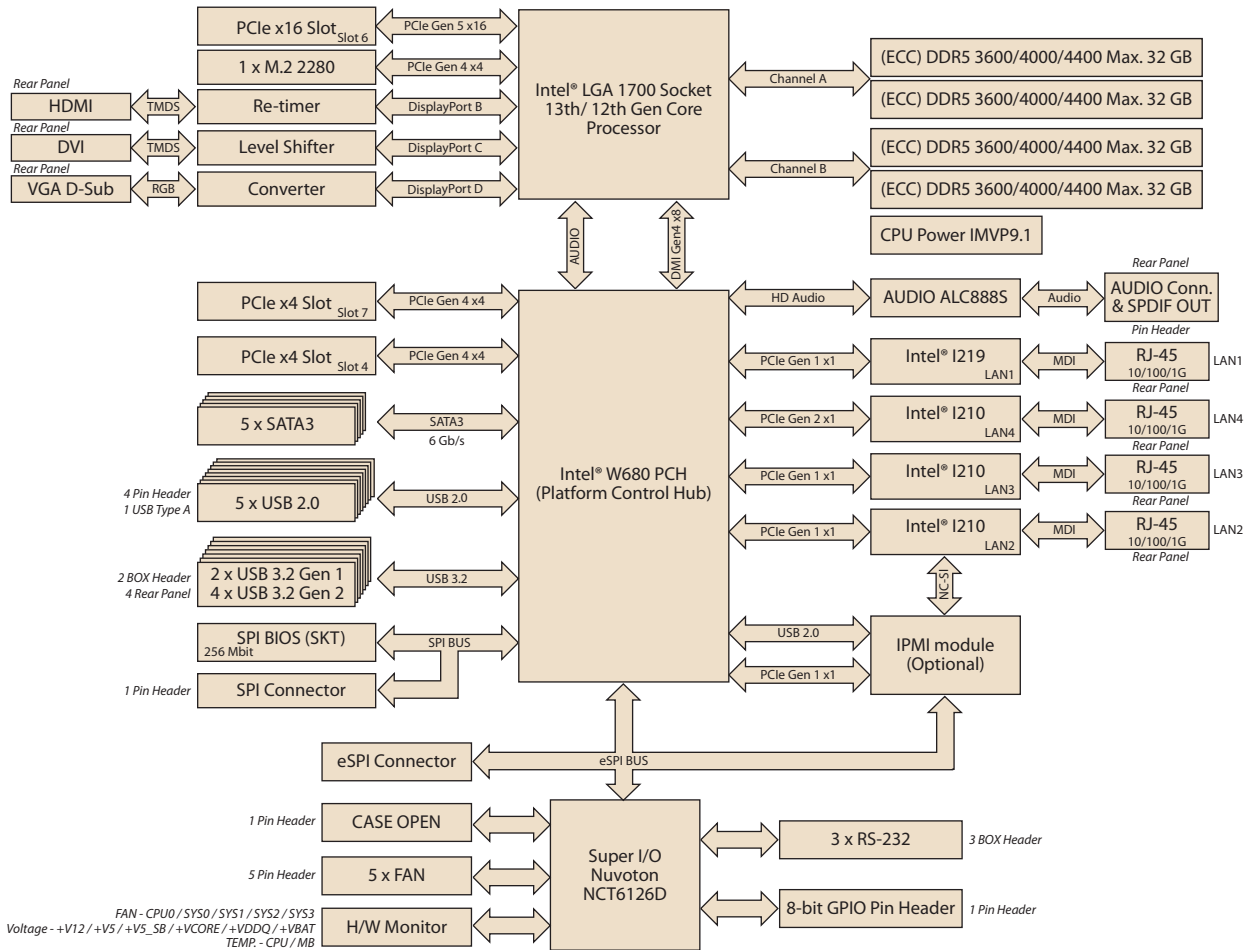

### Ordering Information

Part Number	Chipset	Memory	Display	LAN	SATAIII	IPMI
ASMB-588G2-00A1	W680	DDR5 ECC/Non-ECC UDIMM	VGA + DVI-D + HDMI	2	5	Optional
ASMB-588G4-00A1	W680	DDR5 ECC/Non-ECC UDIMM	VGA + DVI-D + HDMI	4	5	Optional

### Packing List

Part Number	Description	Quantity
2042058800	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
1700001788	COM1 cable	x 1
1960088021T011	I/O shield	x 1
1930005673-11	Screw for M.2 device	x 1

### Optional Accessories

Part Number	Description
1970005531T001	LGA 1700 CPU heatsink for 1U chassis
1970005436T001	LGA 1700 CPU cooler for 2U/4U chassis (CPU 125W)
1970005349T000	LGA 1700 CPU cooler for 2U/4U chassis (CPU under 65W)
1960088060T011	1U I/O shield for ASMB-588
1700031926-11	JFP1 cable for 1U chassis
1990040376T000	1U air duct for ASMB-588 + HPC-7120S
1700002204	Dual-port USB 2.0 cable (27 cm / 10.6 in) with bracket
1700008461	Four-port USB 2.0 cable (30.5 cm / 12 in) with bracket
1700028292-01	Dual-port USB 3.0 cable (30 cm / 11.8 in) with bracket
1701090401	Single port RS-232 COM cable (40 cm / 15.7 in) with bracket
1700026254-01	Dual-port RS-232 COM cable (45 cm / 17.7 in) with bracket
IPMI-2000-00A1	IPMI Module
PCA-TPMSPI-00A1	TPM 2.0 Module by SPI

### I/O View



ASMB-588G4-00A1



ASMB-588G2-00A1

Note: Users need to purchase the ASMB-588 proprietary CPU cooler from Advantech. Other brands of CPU coolers may NOT be compatible with ASMB-588.