

IoT SuperServer SYS-110P-FDWTR-NEBS-DC

Intel Xeon Socket P+ (LGA-4189) 3rd Gen, 600W -48 Vdc redundant PWS, NEBS Level 3 certified 1U edge platform



More details here

Key Applications


Multi-Access Edge Computing, Outdoor DU of 5G Application, Flex-RAN, Open-RAN vBBU,

Key Features

- NEBS Level 3 certified for Telecommunication;
- Socket P+ (LGA-4189) support 3rd Gen Intel® Xeon® Scalable processors;
- 8 DIMMs; Up to 2TB 3DS ECC DDR4-3200: RDIMM/LRDIMM;
- 2x 2.5" drive bays; 1 M.2 NVMe OR 1 M.2 SATA3;
- 6 heavy duty fans with optimal fan speed control; 1 Air Shroud(s);
- 600W Redundant Power Supplies Level (92%+);



Form Factor	1U Rackmount Enclosure: 437 x 43 x 429mm (17.2" x 1.7" x 16.9") Package: 686 x 203 x 610mm (27" x 8" x 24")
Processor	Single Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 32C/64T; Up to 48MB Cache
System Memory	Slot Count: 8 DIMM slots Max Memory (1DPC): Up to 2048GB 3200MT/s ECC DDR4 RDIMM/LRDIMM
Drive Bays Configuration	Default: Total 2 bays <ul style="list-style-type: none"> • 2 internal fixed 2.5" SATA drive bays M.2: 1 M.2 NVMe/SATA slot (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> • 1 PCIe 4.0 x16 LP slot • 2 PCIe 4.0 x16 FHFL slots
On-Board Devices	SATA: SATA (6Gbps) ; RAID 0/1 support Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GBASE-T with Intel® X550
Input / Output	USB: 2 USB 2.0 Type-A ports 2 Type-A ports Video: 1 VGA port

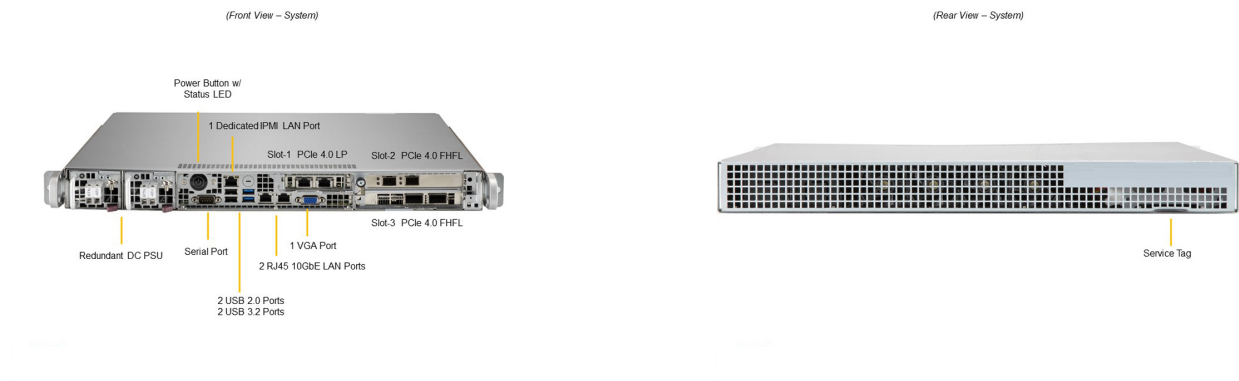

System Cooling	Fans: 6 heavy duty fans with optimal fan speed control Air Shroud: 1 Air Shroud
Power Supply	2x 600W Redundant (1 + 1) Typical 90%+ Level (96%) power supplies
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment CPU thermal trip support, PEPI
Dimensions and Weight	Weight: Gross Weight: 14.99 lbs (6.8 kg) Net Weight: 10.01 lbs (4.54 kg) Available Color: No Paint
Operating Environment	Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12SPW-TF
Chassis	CSE-515B-R601W